


NOTE:

- TESTING CONDITIONS:
 A:INSULATION RESISTANCE 10M Ω
 B:VOLTAGE: DC300V
 C:CONDUCTOR RESISTANCE 3 Ω
- DURATION: 0.01S

PIN OUT:

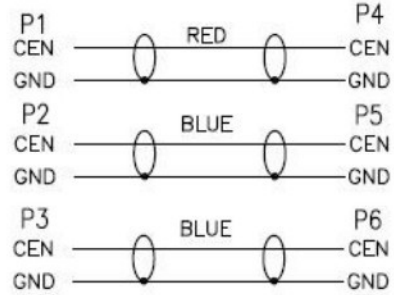

JX65	Cable OFC 3*RCA-M/M(10M)	10000±200
JX64	Cable OFC 3*RCA-M/M(7M)	7000±150
JX63	Cable OFC 3*RCA-M/M(5M)	5000±100
JX62	Cable OFC 3*RCA-M/M(3M)	3000±80
JX61	Cable OFC 3*RCA-M/M(1.5M)	1500±50
CUST.P/N	SPEC	"L"

⑥	AR	OVER MOLDING COLOUR: PVC BLUE	
⑤	2	METAL HOOD SHELL:MATERIAL:ALUMINUM,PRINTING "DIGITAL" RED	
④	2	METAL HOOD SHELL:MATERIAL:ALUMINUM,PRINTING "DIGITAL" BLUE	
③	2	METAL HOOD SHELL:MATERIAL:ALUMINUM,PRINTING "DIGITAL" GREEN	
②	6	RCA PLUG GOLD PLATED CONTACT & SHELL,INSULATION:BROWN	
①	AR	[28(10/0.12OFC+AL+48/0.12OFC OD:5.0mm)]*3F PVC JACKET COLOR:BLUE	
NO.	Q' TY	Description	Remark

THIS DRAWING IS A CONTROLLED DOCUMENT.

DATE: 2007/06/08

UNITS: MM

PART NO. :

TITLE : Cable OFC 3*RCA-M/M

DRAWING NO.:

Samuel Kevin Standly Michael

APPD BY CHECK BY ENG BY DRAWN BY

SCALE: NONE SHEET: 1 OF 1 REV: AO