


CATEGORY 5E LSOH UTP PATCH CABLE 4 PAIR

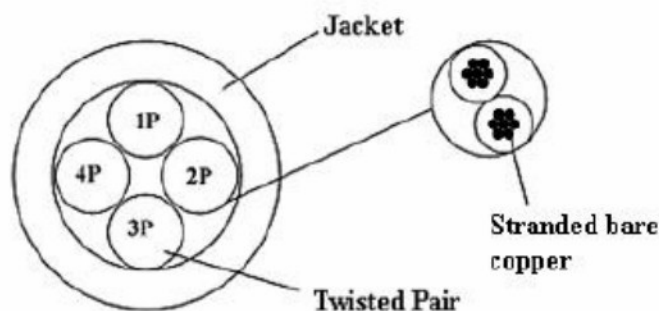

Construction

Twisted Pairs Color Code :

1. PAIR 1: Orange; White/Orange
2. PAIR 2: Blue; White/Blue
3. PAIR 3: Brown; White/Brown
4. PAIR 4: Green; White/Green

Component

1. Conductor: AWG 24 (Solid copper wire 0.2 x 7)
2. Insulators: HDPE (Min. Thickness 0.153; Min. Avg. thickness 0.178)
3. Insulators Diameter: 0.95 ± 0.01
4. Jacket: Min. Thickness 0.58, Min. Avg. thickness 0.46
5. Jacket Diameter: 5.5 ± 0.15

Marking

Jyh Eng UTP PATCH CABLE 24AWG 4PR EIA/TIA-568B.2 CAT.5E LSOH
xxxxxxx-x

or customization

Physical Characters

Unaged:

1. Tensile strength: Polyolefin 2400PSI, Jacket (LSOH) 2000PSI
2. Elongation: Polyolefin 300% min. Jacket (LSOH) 100% min.

After Aging:

1. Tensile strength: Polyolefin 75%min. Jacket (LSOH) 85% min.
2. Elongation: Polyolefin 75%min. Jacket (LSOH) 50% min.

Electric Characters

1. Voltage rating: 30V
2. Temperature rating: 75 Degree Celsius
3. Spark test: DC 2.5 KV / 0.15 Sec. or AC 1.75KV / 0.15 Sec.
4. Dielectric strength: DC 2.5 KV / 0.15 Sec. or AC 1.75 KV / 0.15 Sec.
5. Insulating resistance: 89.2 Ohms/km max.
6. Mutual Capacitance: 5.6 nF/100M max.
7. D-C Resistance Unbalance: 5% max.
8. Characteristic Impedance : 100±15 Ohms

FREQ	Attenuation	NEXT	VOP	PS-NEXT	ELFEXT	PSELFEXT	RL	DELAY
MHz	(dB/100m)	(dB)	%	(dB)	(dB)	(dB/100m)	(dB)	(ns/100m)
1	2.4	65.3	63.0	62.3	63.0	60.8	20.0	570.0
4	4.9	56.3	51.0	53.3	51.7	48.7	23.0	552.0
8	7.0	51.8	45.0	48.8	45.7	42.7	24.5	546.7
10	7.8	50.3	43.0	47.3	43.8	40.8	25.0	545.4
16	9.8	47.3	38.0	44.4	39.7	36.7	25.0	543.0
20	11.1	45.8	35.0	42.8	37.7	34.7	25.0	542.0
25	12.5	44.3	32.0	41.3	35.8	32.8	24.2	541.2
31.25	14.0	42.9	29.0	39.9	33.9	30.9	23.3	540.4
62.50	20.4	38.4	18.0	35.4	27.8	24.8	20.7	538.6
100	26.4	35.3	9.0	32.3	23.8	20.8	19.0	538.0

