

Specification for Hyper-Data 1000 Cat.5e STP(FTP) Solid Lan Cable
Spec. No. S961205 Version: A Date: December 5, 2007

24AWG x 4P

ISO/IEC 11801: Horizontal Cable (Solid Conductor)

1.Conductor: Solid Bare copper (1 x AWG24)

2.Insulation : HDPE(CMI-75E)

Min. Avg. Thickness: 0.201 mm;

Min. Thickness: 0.175mm

3.Color Code:

Pair 1: Blue & White/Blue;

Pair 2: Orange & White/Orange

Pair 3: Green & White/Green;

Pair 4: Brown & White/Brown

4.Shield: drain wire(tinned copper conductor) and aluminum-mylar tape

5.Jacket: HDPE

Min. Avg. Thickness: 0.585 mm;

Min. Thickness: 0.458 mm

Approximate O.D.: 5.8 mm +/- 0.3mm

temperature: (+60℃ ~ -40℃)

6.Electric Requirements: (Cable length: 100M)

Characteristic Impedance(Z_0): 85Ω ~ 115Ω (1 ~ 100 MHz)

DC. Resistance Capacitance Unbalance: 5%

Pair-to-Ground Capacitance Unbalance: 330 pF/100M Max


Conductor Resistance: 9.38Ω/ 100M 20% Max

Mutual Capacitance: 5.6 nF/m Max

Spark Test: 2.5KV

ROHS Compliant

Cat.5e STP(FTP) Solid Lan Cable

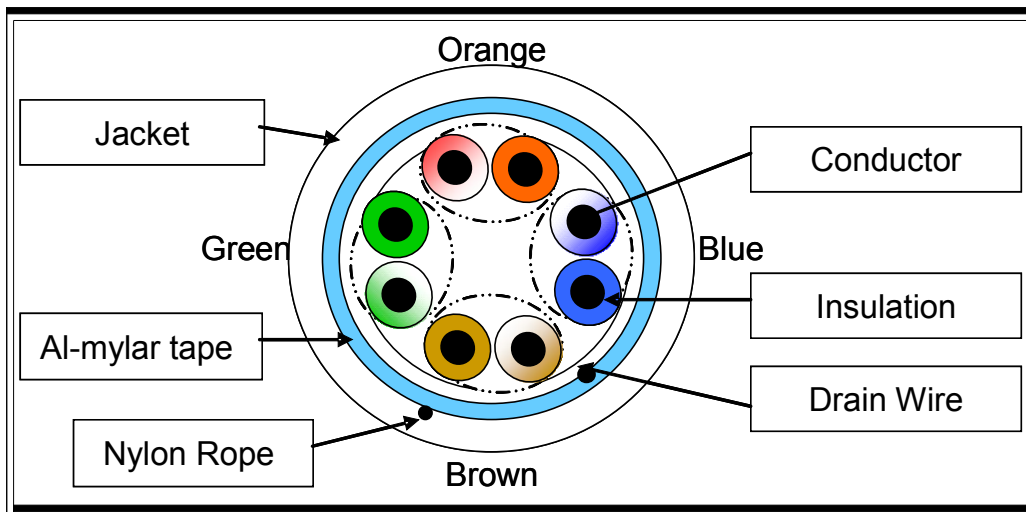

Frequency MHz	Att. Solid	Pr-Pr NEXT	PS NEXT	Prop. Delay ns	Delay Skew ns	Return Loss	Pr-Pr ELFEXT	PS ELFEXT
1	2.8	65.3	62.3	538.5	45	20.0	63.8	60.8
10	7.9	50.3	47.3	545.0	45	25.0	43.8	40.8
16	9.4	47.3	44.4	539.9	45	25.0	39.7	36.7
20	10.7	45.8	42.8	540.2	45	25.0	37.7	34.7
25	11.8	44.4	41.3	540.8	45	24.3	35.8	32.8
31.25	13.4	42.9	39.9	541.4	45	23.6	33.9	30.9
62.5	18.9	38.4	35.4	542.5	45	21.5	27.8	24.8
100	24.2	35.3	32.3	543.0	45	20.1	23.8	20.8

ROHS Compliant