

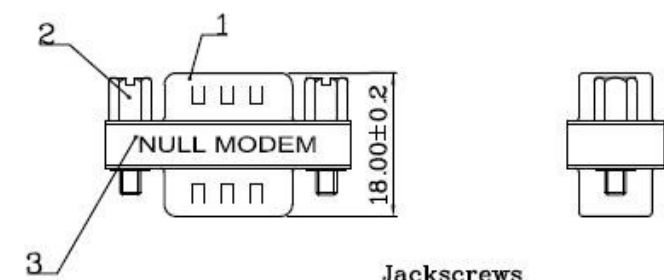



**SPECIFICATION:**

- VOLTAGE RATING: 300 VAC(rms).
- CURRENT RATING: 5 Amp CONTINUOUS.
- DIELECTRIC STRENGTH: 1000 VAC.
- CONTACT RESISTANCE: 10 mΩ MAX 1 ADC.
- INSULATION RRSISTANCE: 5000 MΩ MIN.
- MATING FORCE INSERTION FORCE: 1 OZ-16 OZ  
AVERAGE 150 GRAM.  
EXTRACTION FORCE: 1 KG MIN.

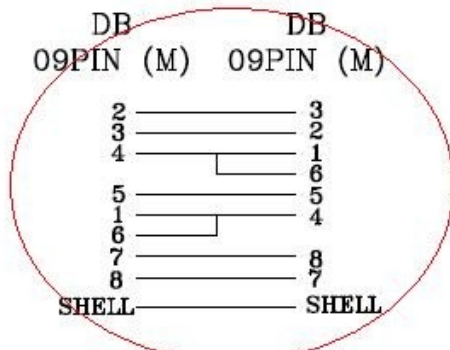

Jackscrews  
UNC #4-40  
(2 Paces)



- 100% OPEN / SHORT / INSULATING TEST
- INSULATION TEST: 2MΩ

**NM64**

NO.	COMPONENTS	DESCRIPTION	Q'TY
1	D09MTBBSN	D-SUB 09P Male Connector. Insulator: Blue P.B.T Shell: Steel Tin Plated Contact: Bress G/F Gold Plating	2
2	Jack Screw	Slotted Nut: UNC #4-40. Thread: UNC #4-40. Nickel Plated	4
3	Shell	Steel: Tin Plated	1
4			
5			

NO.	DATE	MODIFICATION
2		
1		

APPROVED BY:		DATE:
CHECKED BY:		DATE:
PART NO: T065-04285		DESIGN BY: DATE:
CUSTOMER NO:		PART NO:
DESCRIPTION: D-SUB 09P Male To D-SUB 09P Male		SCALE: X:1 UNIT: mm VERSION: A
DRAWN BY: CH&N 02.09.2008		DRAWING NO: 04285