
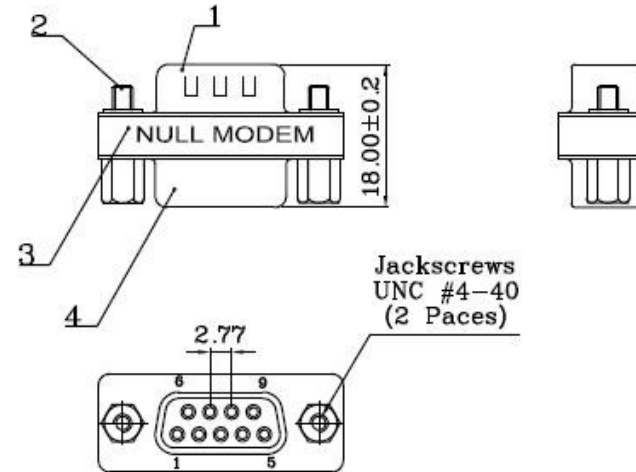



**SPECIFICATION:**

- VOLTAGE RATING: 300 VAC(rms).
- CURRENT RATING: 5 Amp CONTINUOUS.
- DIELECTRIC STRENGTH: 1000 VAC.
- CONTACT RESISTANCE: 10 mΩ MAX 1 ADC.
- INSULATION RESISTANCE: 5000 MΩ MIN.
- MATING FORCE INSERTION FORCE: 1 OZ-16 OZ  
AVERAGE 150 GRAM.  
EXTRACTION FORCE: 1 KG MIN.

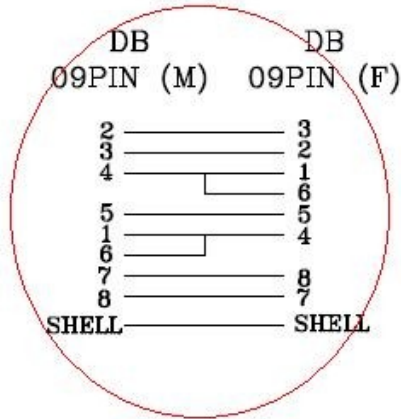

- 100% OPEN / SHORT / INSULATING TEST
- INSULATION TEST: 2M

**NM65**

NO.	DATE	MODIFICATION
2		
1		

APPROVED BY:	DATE:	
CHECKED BY:	DATE:	
DESIGN BY:	DATE:	
PART NO:		
SCALE:	UNIT:	VERSION:
X:1	mm	A
DRAWN BY:	DRAWING NO:	
CHEN JUL 09 2008	04284	

COMPONENTS	DESCRIPTION	Q'TY
1 D09MTBBSN	D-SUB 09P Male Connector. Insulator: Blue P.B.T Shell: Steel Tin Plated Contact: Bress G/F Gold Plating	1
2 Jack Screw	Slotted Nut: UNC #4-40. Thread: UNC #4-40. Nickel Plated	2
3 Shell	Steel: Tin Plated	1
4 D09FTBBSN	D-SUB 09P Female Connector. Insulator: Blue P.B.T Shell: Steel Tin Plated Contact: Bress G/F Gold Plating	1

PART NO: T065-04284  
 CUSTOMER NO:  
 DESCRIPTION:  
 D-SUB 09P Male To  
 D-SUB 09P Female