


Mold tool dimension in mm.

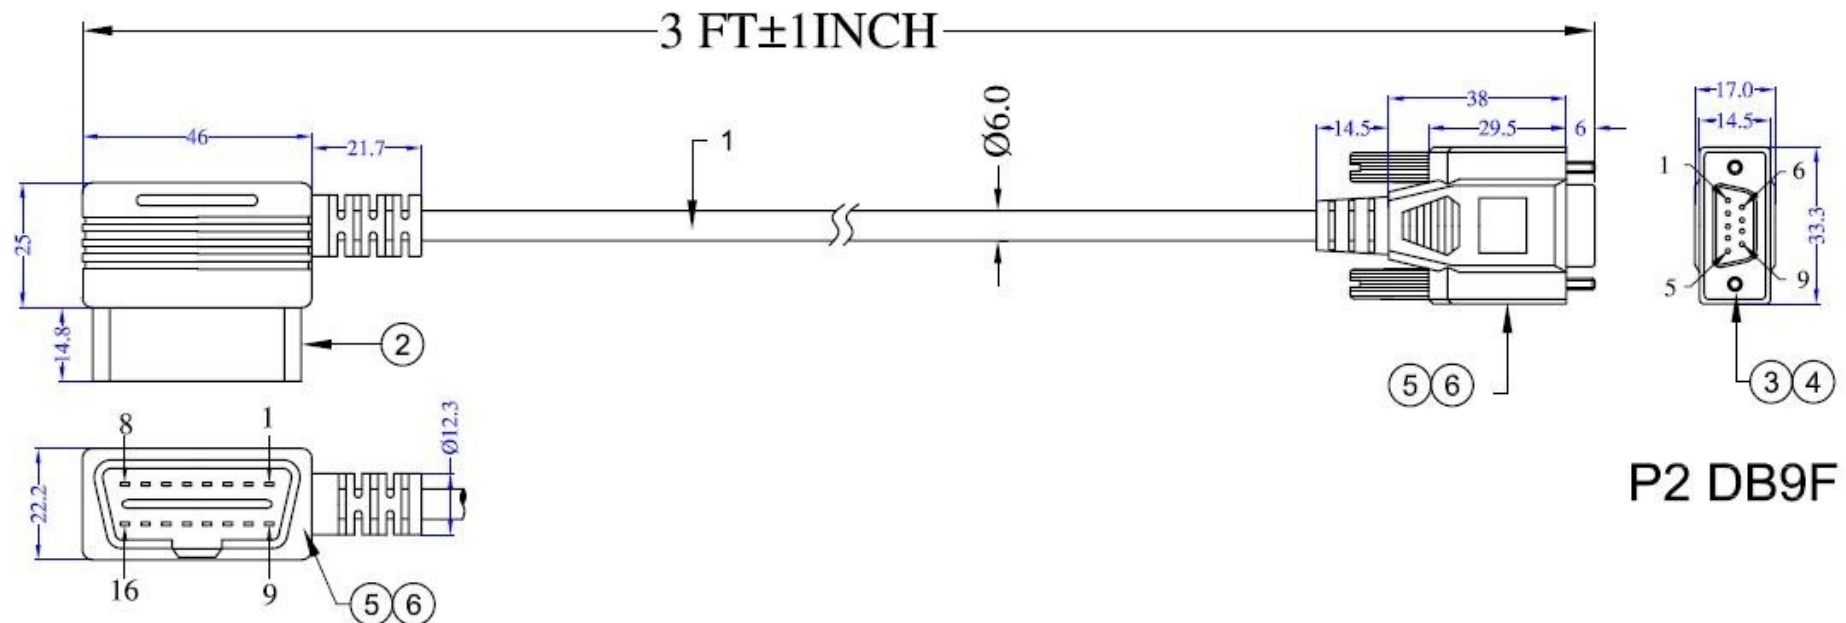

P1 OBD-16M

P2 DB9F

WIRE TERMINATIONS

P1 OBD-16M	P2 DB9F
5	1
4	2
6	3
7	4
14	5
10	6
2	7
15	8
16	9

REMARKS:

1.ALL COMPONENTS ARE RoHS COMPLIANT

6	BLACK PVC 50P MOLDING	
5	PE MOLDING	
4	#4-40 SCREW	2PCS
3	D-SUB 9PIN FEMALE PLUG	1PCS
2	OBD 16P MALE PLUG	1PCS
1	UL2464 9C 24AWG	3FT

LIST OF MATERIALS

1.ELECTRICAL TEST:

<1>100% OPEN SHORT&MISS WIRE TEST

<2>INSULATION RESISYANCE:DC 100V 10ms 5M ohm(MIN).

<3>CONDUCTOR RESISTANCE:1 ohm MAX.

OB01

REV	DATE	CONTENTS	DRAWING BY	COLLATED BY	HW	DRAWING NO
			DESIGNED BY	APPROVED BY	18026-3	UNIT: 100