

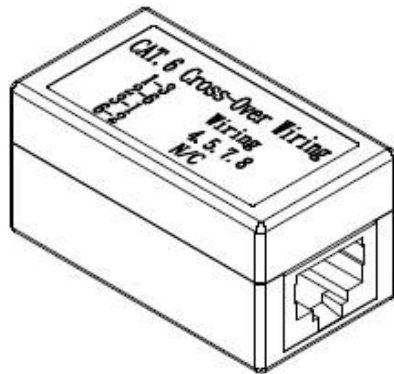


Cat.6 CROSSOVER INLINE COUPLER (UTP)



Dimensions : m/m

CAT. 6 Cross-Over Wiring	
1-3	Wiring
2-6	4. 5. 7. 8
3-1	N/C
6-2	

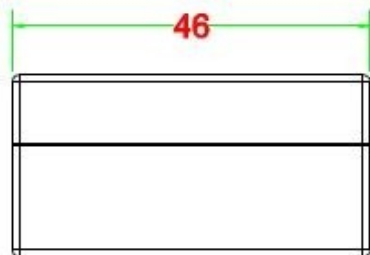

Performance:

Meets Cat.6 EIA/TIA 568B.2-1 Standard.

Materials:

Plastic Body : Fireproof ABS UL-94V0

RJ-45 Jack : 8P8C 50 micro Inches gold plated

PCB : FR-4 / 1.0mm UL-94V0

Electrical Specifications:

Insulation Resistance : 500M ohms (min.)

Contact Resistance : 20m ohms (max.)

Current Rating : 1.5 Amps .

DC Resistance : 0.1 ohm (max.)

Withstanding Voltage : 1000 VAC RMS @ 60Hz / 1 min.

Mechanical Specifications:

RJ-45 Jack Insertion Cycle : Over 2000 Cycles (min.)

Operation Temperature : -40 ~ +70 degree / C

DRAW NO:		ITEM NO:	6IC-UXJJX
	APPR	CUSTOMER:	
UNIT: m/m	CHECK	DATE:	
SCALE:	DESIGN	TOLERANCE:	• ± 1 • X ± 0.2 • XX ± 0.15