

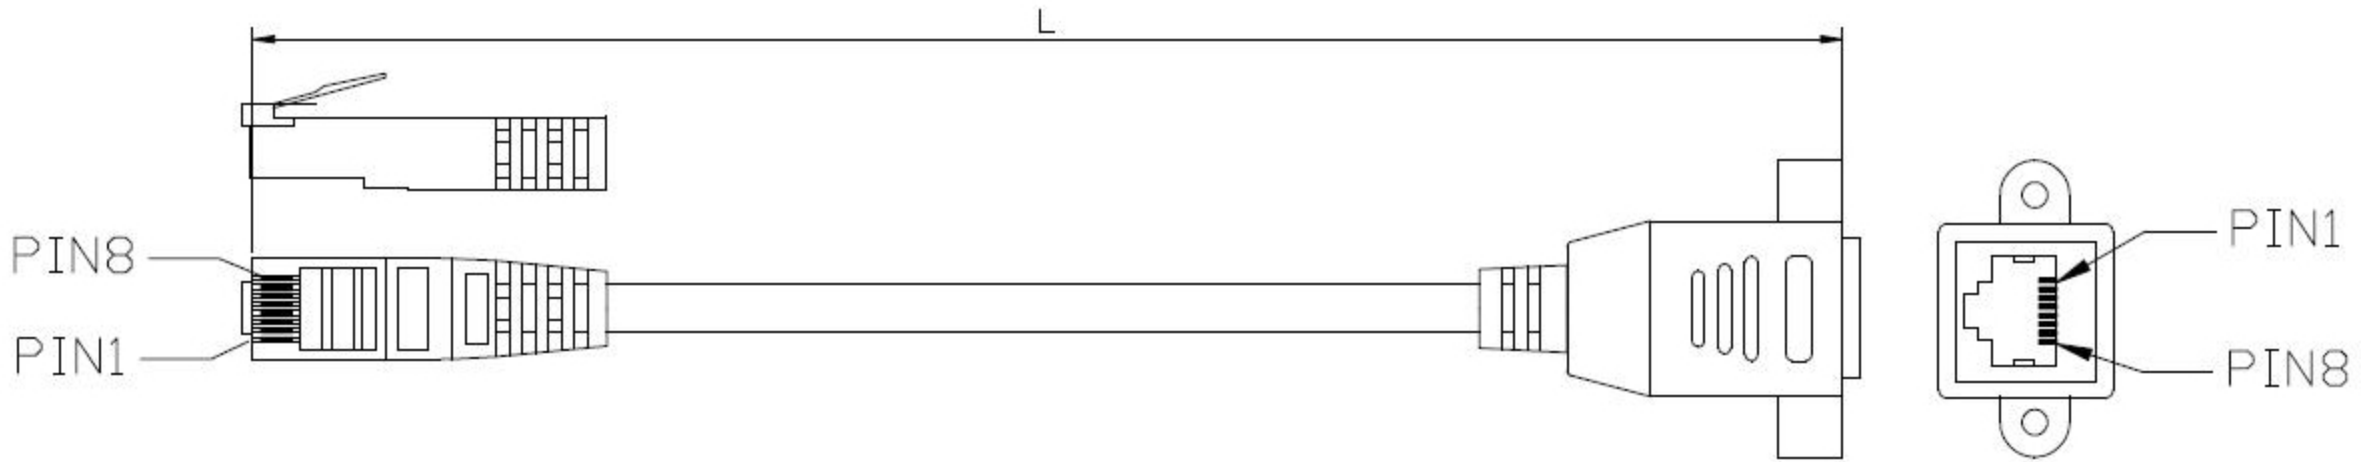


BUY ON

www.cablematic.com

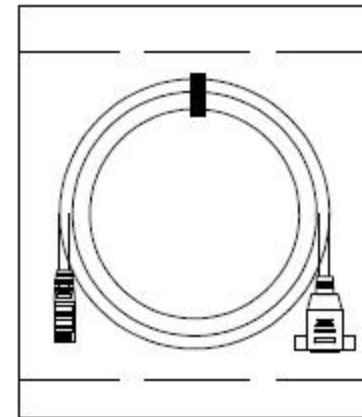

PIN OUT:

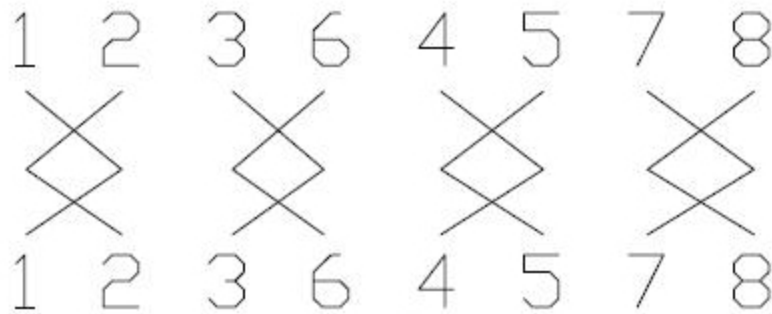

NOTES:

- 1.100% OPEN & SHORT TESTING
- 2.VOLTAGE:300V DC
- 3.INSULATION RESISTANCE:20M ohm
- 4.CONTACT RESISTANCE:1 ohm

Part number	Length
	1000mm±30mm
	2000mm±50mm
	3000mm±50mm
	5000mm±50mm

8		
7		
6		
5		
4		45Pa PVC
3		RJ45 8P8C JACK Shield
2		RJ45 8P8C PLUG
1		CAT.6 UTP Cable 24AWG (7/0.2CCA)*4P OD:6.0MM
NO.	Material	Description

Title:		cat.6 cable panel mount			
Customer:		Page:1/1	Drawn BY:CLR		
Customer P/N:		REV:A	Check BY:DYH		
Date:2015.5.15	Drawing NO.:FLRJ45-1	Unit:mm	Appd BY:		