



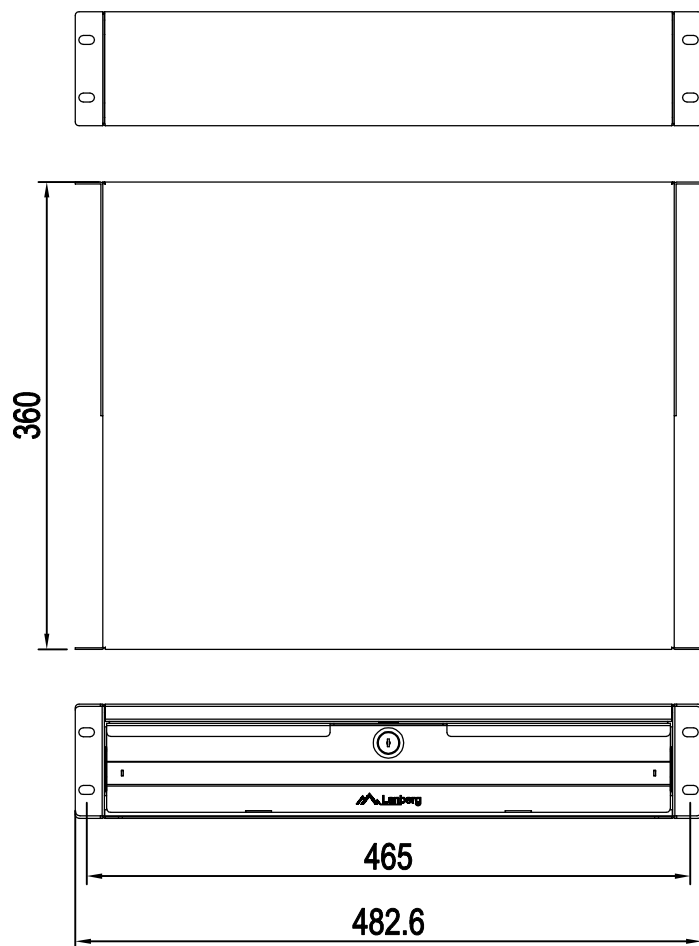

6pcs M6 nuts are riveted with internal pressure

The mounting ears are fixed with M6 screws

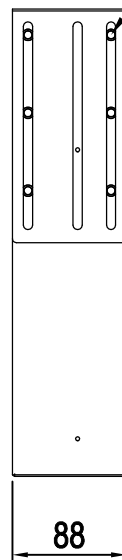


88

Case

Outer frame

Adjustable mounting ears

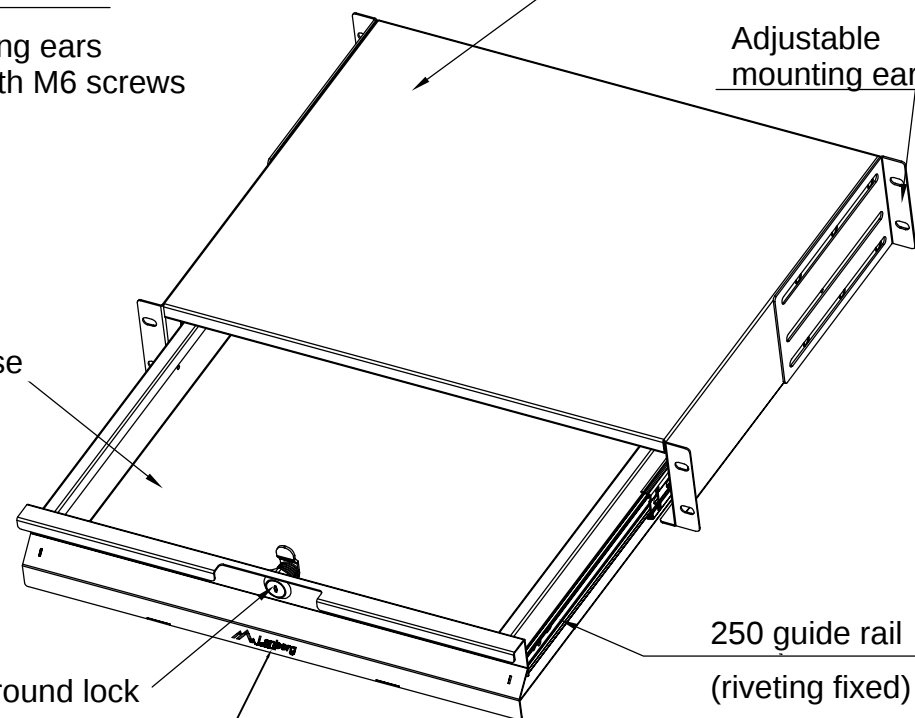

18*20 Small round lock

250 guide rail (riveting fixed)

Spray black plastic powder
LOGO silk screen White

Material thickness:

1. Case & outer frame: 1.2MM

2. Adjustable mounting ears: 1.5MM