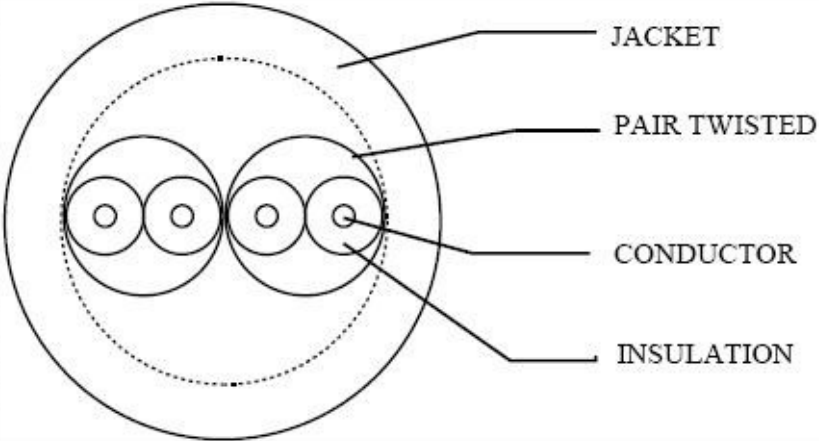


SPECIFICATION:		2P*28AWG		CONSTRUCTION D.W.G															
ITEM		SPECIFICATION																	
CONDUCTOR	AWG	28AWG																	
	MATERIAL	BARE COPPER																	
	COND.SIZE	7/0.127± 0.008mm																	
INSULATION	MIN.AVG.THICK	0.25mm																	
	MATERIAL	PP																	
	O . D	0.96± 0.05mm																	
	N O.	2P																	
JACKET	MIN.AVG.THICK	0.23mm																	
	MATERIAL	LSNH																	
	COLOUR																		
	O D	4.50 ± 0.10mm																	
				COLOUR CODE:															
				1.BLACK*RED 2.YELLOW*GREEN															
				MARKING															
				REMARK															
				RT26															
ELECTRICAL CHARACTERISTICS		PHYSICAL PROPERTIES		<table><tr><td>APPROVED</td><td></td><td>CUSTOMER</td><td></td></tr><tr><td>CHECKED</td><td></td><td>REV</td><td>A</td></tr><tr><td>DRAWING</td><td>ZTL</td><td>DATE</td><td>2007/9/30</td></tr></table>				APPROVED		CUSTOMER		CHECKED		REV	A	DRAWING	ZTL	DATE	2007/9/30
APPROVED		CUSTOMER																	
CHECKED		REV	A																
DRAWING	ZTL	DATE	2007/9/30																
1. Conductor Resistance: AT 20℃ MAX 28AWG: 237.25Ω/km;																			
2. Insulation Resistance: 10MΩ-km min at 20℃ dc 500V																			
3. Dielectric Strength: AC 500V/1minute																			