


BUY ON

[www.cablematic.com](http://www.cablematic.com)

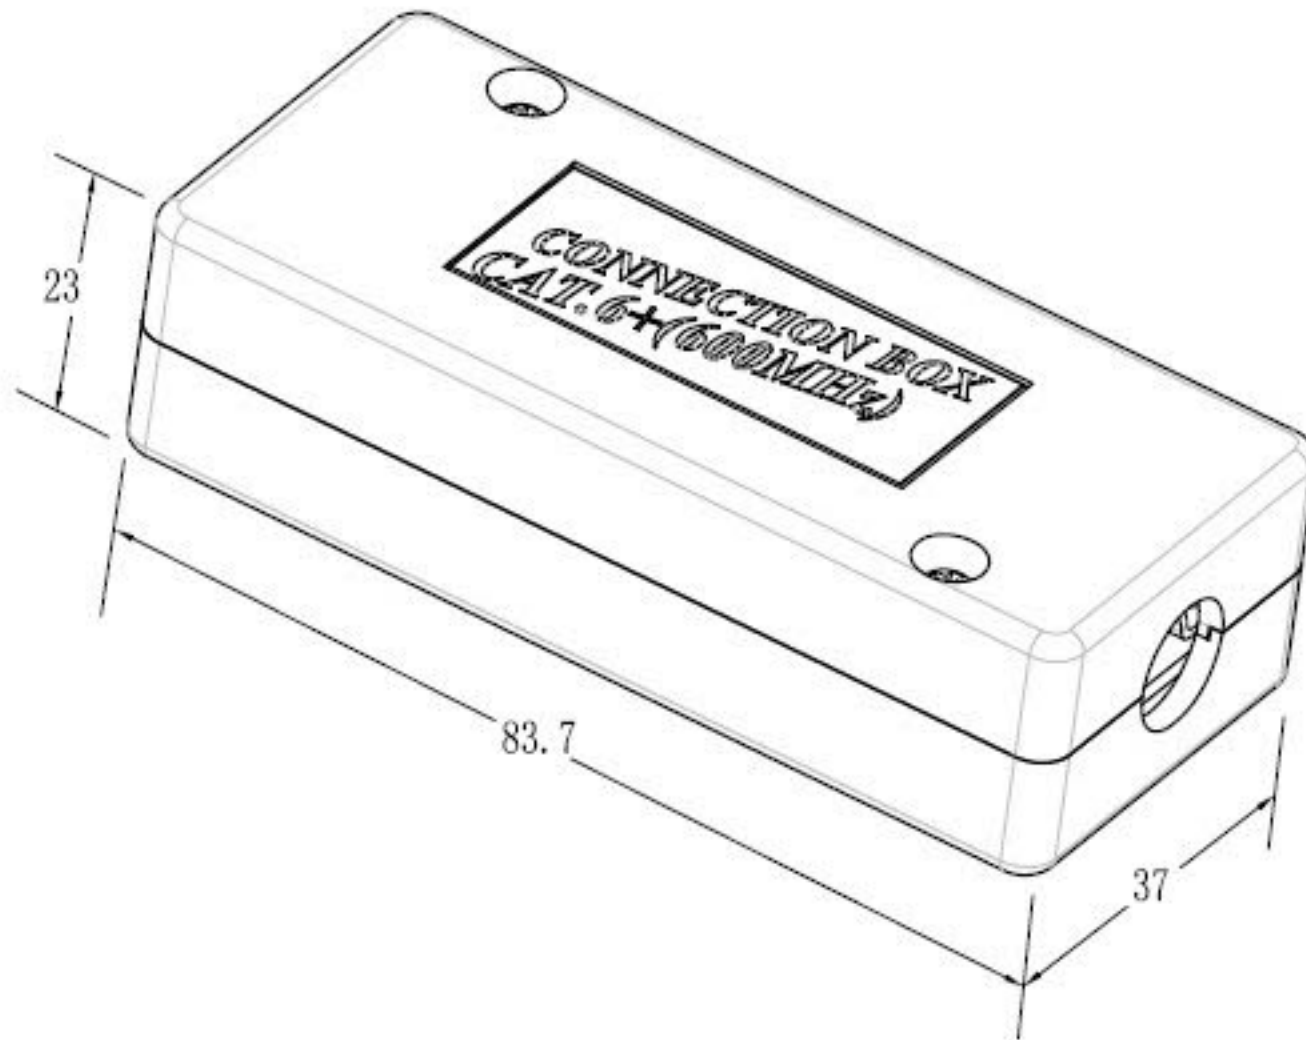

### Materials:


Box Cover: Fireproof PC/ABS UL-94V0 (Black) /Inside metalized  
Box Base: Fireproof PC/ABS UL-94V0 (Black) /Inside metalized  
PCB : FR-4/1.6mm UL-94V0  
IDC Pin : Bronze & Tinned  
IDC Terminal: For 22-26 AWG Cable

### Electrical Specifications:

Insulation Resistance: 500M ohms (min.)  
Contact Resistance: 20m ohms (max.)  
Current Rating : 1.5 Amps.  
Withstanding Voltage : 1000 VAC RMS @ 60Hz/ 1 mln.

### Accessory:

1. Screw-type Strain Relf (M3X12)
2. Cable Inlet (4Pcs)
3. With Adhesive Tapes For Fixing

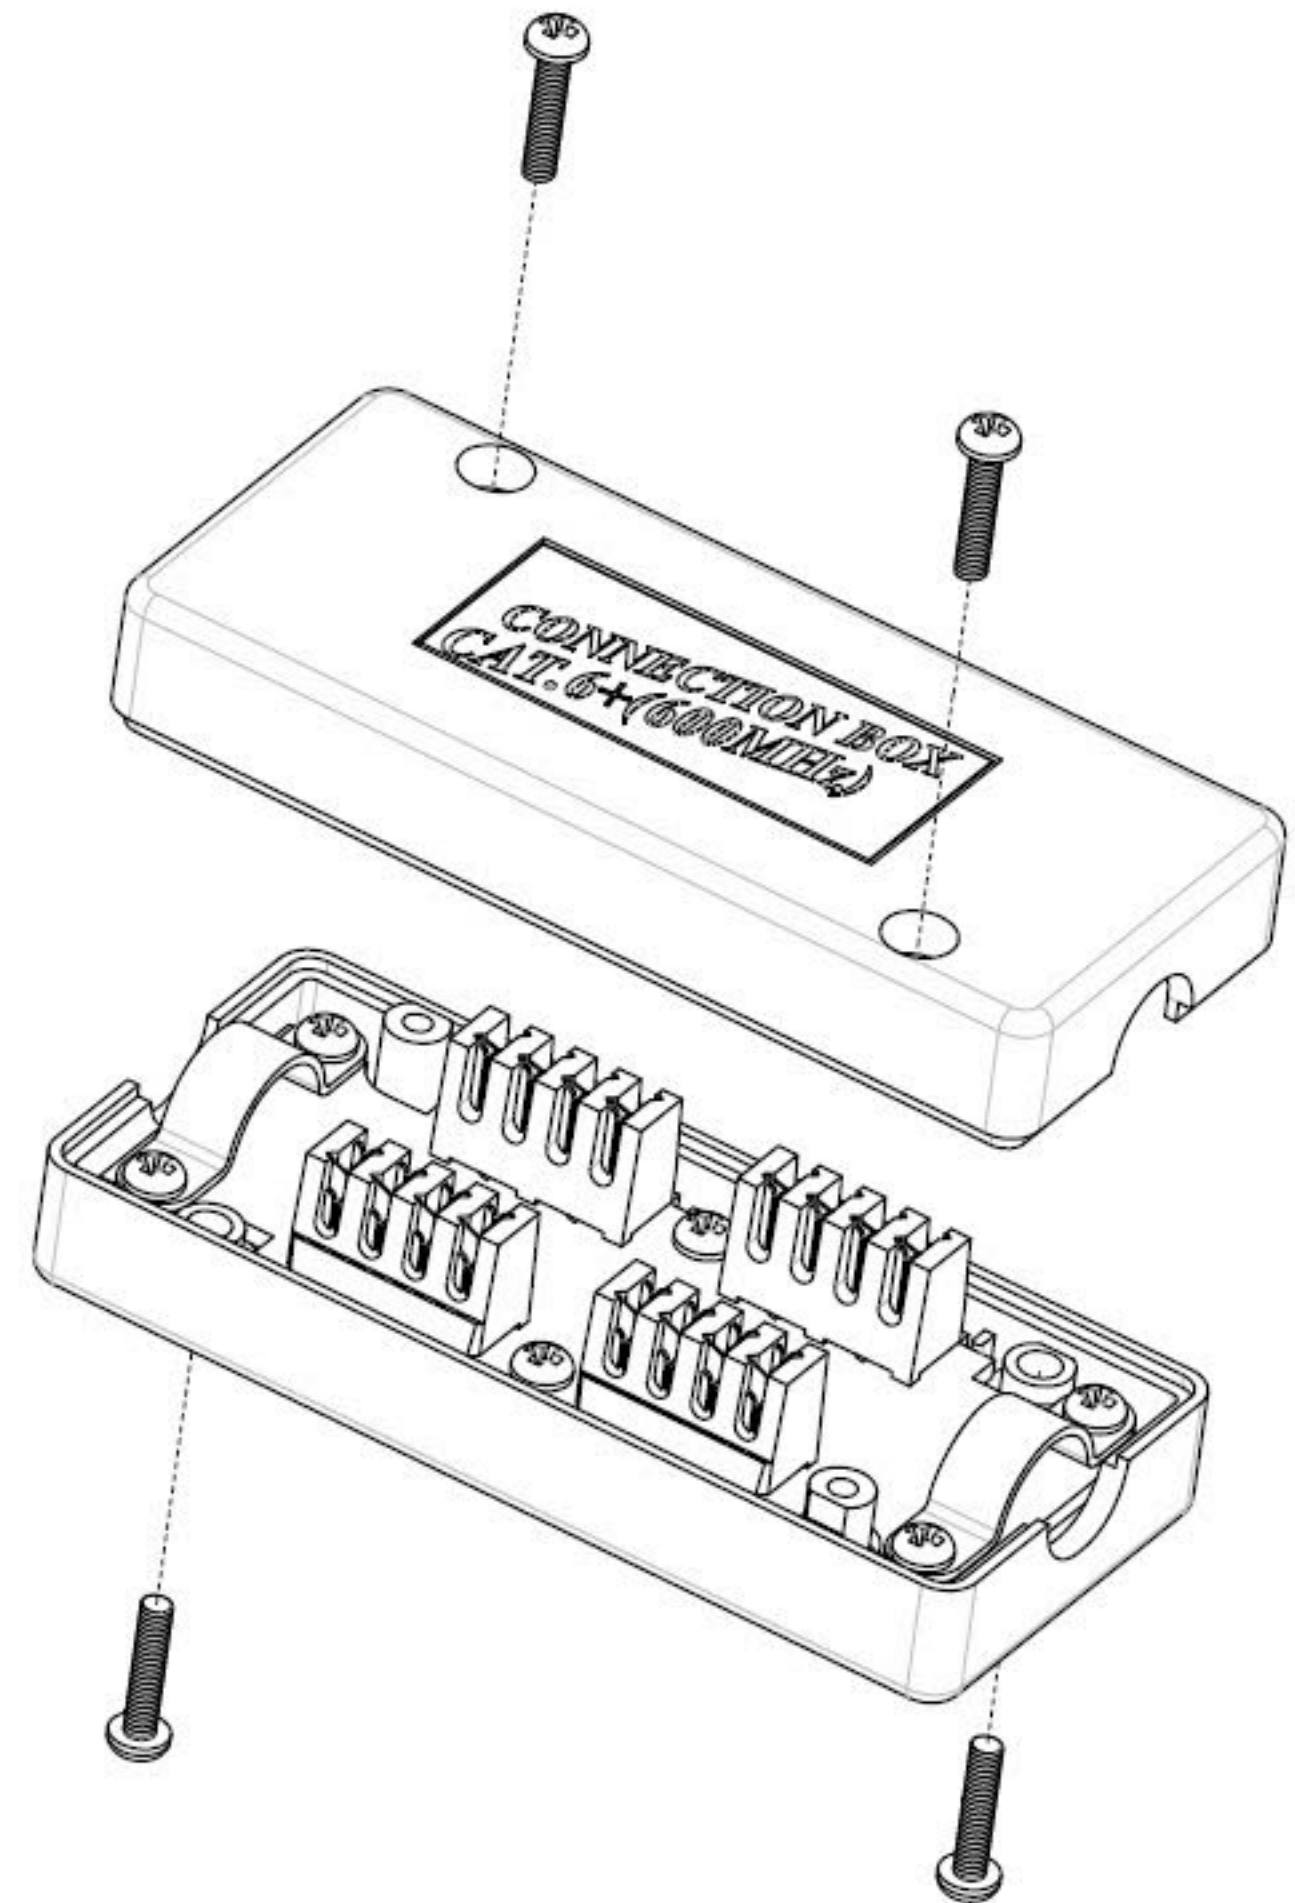

|          |           |              |  |
|----------|-----------|--------------|--|
| DRAW NO: |           | ITEM NO:     |  |
|          | APPR      | CUSTOMER NO: |  |
| UNIT: mm | DESIGN    | CUSTOMER:    |  |
| SCALE:   | TOLERANCE | DATE:        |  |