
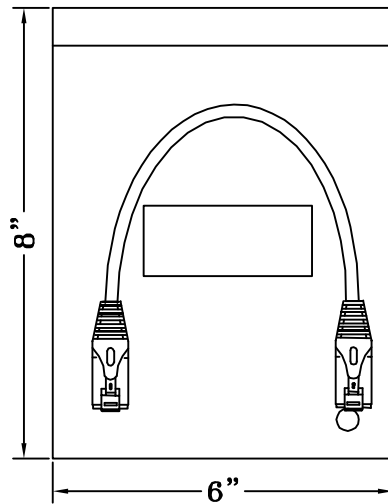
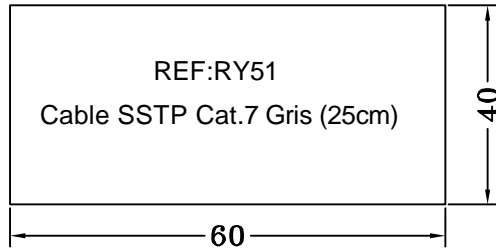




Weight	CUSTOMER NO.:	REMARK
15g-K1	RY51	Cablematic

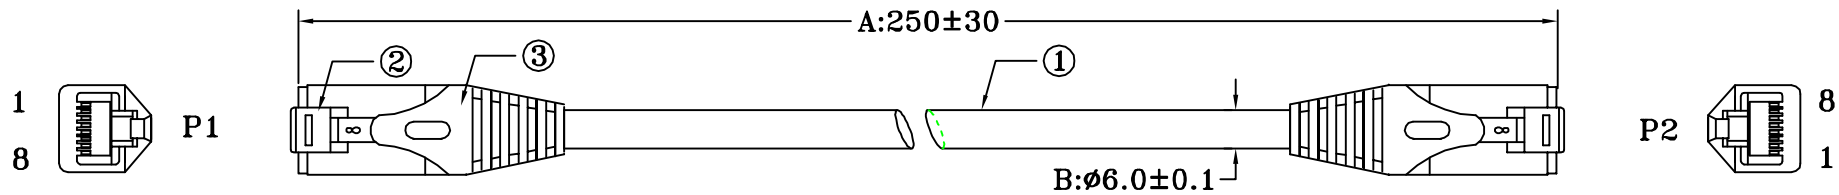

PINOUT:

P1		P2	
8P8C		8P8C	
1	---	1	WHITE/ORANGE
2	---	2	ORANGE
3	---	3	WHITE/GREEN
6	---	6	GREEN
4	---	4	BLUE
5	---	5	WHITE/BLUE
7	---	7	WHITE/BROWN
8	---	8	BROWN
	SHIELD		SHIELD

NOTE:
1) 100% ENGLABEL

3	OUTER JACKET PVC 4Pa GRAY (200) (R+S)
2	RJ45 8P8C PLUG FLAIED OD 5.0" SHLL OD FLASH FOR SFTP 二件式 單排 CAT.7用 (R+S)
1	CAT.7 SFTP UL233E (2#P-A) * 4E(95A.M) OD 6.0WDR (200) R+S 20W1

A	FRIST EDITION	05/08/10
REV.	ECR	DESCRIPTION	C.N. DATE
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF WIRETEK COMPUTER LIMITED AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF WIRETEK COMPUTER LIMITED.			
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS ANGULAR TOLERANCE: ±1.0°		TITLE	
		SSTP CABLE	
DIMENSIONS	TOLERANCE	CHKD.	CONF.
0.00 TO 30.00mm	±0.10mm		
30.01 TO 80.00mm	±0.13mm	DR.	APPD.
80.01 TO 150.00mm	±0.15mm	
150.01mm	±0.20mm	PART NO.	2400-0761
MATERIAL	MATERIAL	SCALE	SHEET 1/1 UNIT MM SIZE A4 REV. A
FINISH	FINISH		