


ELECTRICAL TEST:

- 1.OPEN / SHORT 100% TEST.
- 2.CONTACT RESISTANCE : 1Ω(MAX).
3. INSULATION RESISTANCE : 20MΩ (MIN).
- 4.HI-POT : DC 300V /10MS.



PIN ASSIGNMENT

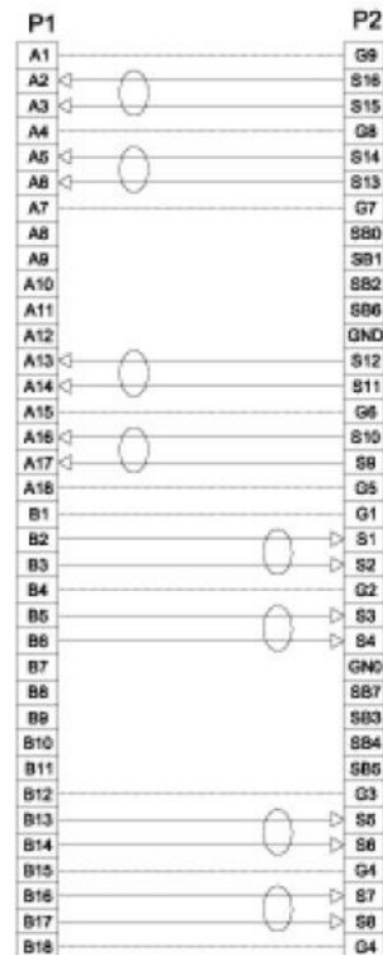

•	4-21-0068-708051	ARI BAG 70*80mm	1	PCS
13	4-20-0062-002001	ACETATE TAPE BLACK W=20mm	50*2	PCS
12	4-12-0003-010310	COVER DUSTPROOF	1	PCS
11	4-12-0015-003651	LATCH MATERIAL: SUS #301	1	PCS
10	4-13-0028-254551	OVAL HEAD SCREW M2.5*0.45	2	PCS
9	4-13-0027-254551	THUMBSCREW M2.5*0.45	2	PCS
8	3-02-0002-098701	TRL-THERMELT-867		G
7	3-02-0001-532151	PE 5321	1.3	G
6	3-03-0002-005001	PP BK	4.5	G
5	2-70-0001-011501	MINI SAS 36P PCB	1	PCS
4	2-67-0003-010351	RING CRIMP, OD:7.87mm ,ZINC ALLOY SHELL NICKEL PALTED	1	PCS
3	2-67-0002-010351	INFINIBAND BACKSHELL KIT (4x SCREW), ZINC ALLOY SHELL NICKEL PALTED	1	PCS
2	2-67-0001-004X51	INFINIBAND 4x PCB	1	PCS
1	1-70-0002-200251	(30#*2C+2D)*8P+8C+FILLER	1000	mm

NO.	PART NO.	DESCRIPTION	QTY	UNIT
A				07/9/26
REV.		DESCRIPTION		DATE

UNLESS OTHERWISE SPECIFIED TOLERANCE		
ANG.	±5°	
0.	±0.5	
.0	±0.3	
.00	±0.2	
SCALE:	NONE	UNIT: mm
DRAWN	Xing Fa	07/9/26
CHECKED	ERIC	07/9/26
APPROVED	/ /	
SIZE	A4	REV. A

DC-AS78

PRODUCT NO. _____
FILE NAME: _____