

# 4/8/16 CH AHD/HDCVI/HDTVI VIDEO BALUN

## Description

You are bidding on four of HDTVI Coaxial to UTP Cat5/5e/6 balun passive adapter. This set of transceivers will allow you to transmit TVI 720P HD video signal upto 300M (985ft) via Cat 6 cable, Cat 5E and 5 will be slightly less in distance capability. You will need a pair for each camera cable run.

## Features

Transmission Signal: HD No power required 4/8/16 channel transmitter

Category Type: UTP CAT5/5E/6

Coaxial Video Connector: BNC 75ohms

Twisted-pair Video Connector: Push-terminal 100ohms

Compatible with all digital HD-TVI, CVI, and AHD analog cameras

Color video up to 985FT for HD-CVI 720P digital camera

Color video up to 650FT for HD-TVI 720P digital camera

Color video up to 985FT for AHD 720 analog camera

Built-in TVS (transient voltage suppressor) for surge protection

Anti-static wave filter design

Lightning protection design (GRADE III)

Coaxial Cable Connector: 2KV (common-code) per: IEC61000-4-2

UTP Cable Connector: 2KV (different-code) per: IEC1000-4-5

Anti-interference: >60dB

MTBF: >10000h


Working temperature: -10~+55 Degree

Storage temperature: -20~+70 Degree

Humidity: 0~95 %

Color: Black

## Connection

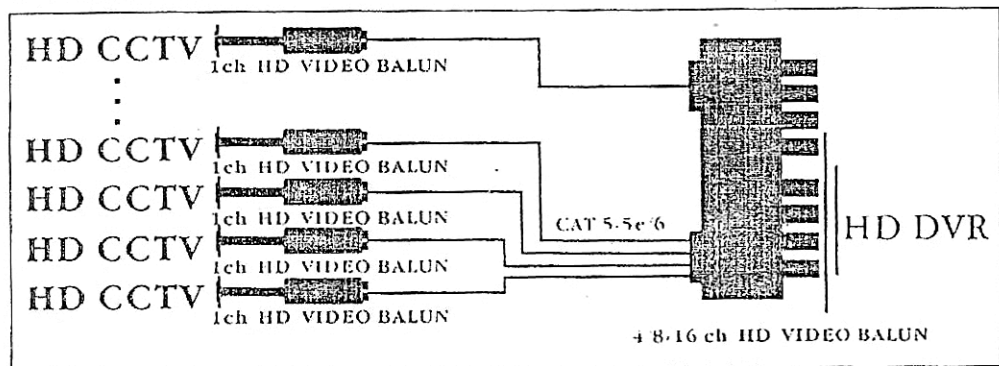

BUY ON

[www.cablematic.com](http://www.cablematic.com)