

Coaxial Cabling : Video Distributor & Video Amplifier Series

ITEM NO.: CD102, CD104, CD108, CD408, CD816, CD116, CD1664, CD102A, CD408A, CD816A, CD1632A, CA101, CA101A, CA404,

CD102, CD104, CD108, CD408, CD816, CD116, CD1664 are video distributors with one or multi video input to multi output. CD102A, CD408A, CD816A, CD1632A, CA101, CA101A, CA404 are amplifiers for long-range video transmission up to 1000 meters over RG59 coaxial cable. They are suitable for far distance, different floor in a building or different electrical field.

Features:

Video Distributor

CD102	1 Input to 2 Output,	CD104	1 Input to 4 Output
CD108	1 Input to 8 Output,	CD408	4 Input to 8 Output
CD816	8 Input to 16 Output,	CD116	1 Input to 16 Output
CD1664	16 Input to 64 Output,		

- It can be connected video camera, multiplexer, VCR, DVR...etc.
- Power supply included.

Video Distribution Amplifier

CD102A	1 Input to 2 Output,	CD408A	4 Input to 8 Output
CD816A	8 Input to 16 Output,	CD1632A	16 Input to 32 Output

- Wide bandwidth, video gain compensation amplification.
- HF compensation.
- 10dB adjustable image gain.
- Sharpness and Brightness adjustment.
- Transmission range: 1000 meters (RG59 coaxial cable)
- It can be connected video camera, multiplexer, VCR, DVR...etc.
- Power supply included.


Video Amplifier

CA101	1 Input to 1 Output,	CA101A	1 Input to 1 Output with Audio
CA404	4 Input to 4 Output		

- Wide bandwidth, video gain compensation amplification.
- Video and Audio level adjustment. (CA101A)
- HF compensation.
- 10dB adjustable image gain.
- Sharpness and Brightness adjustment.
- Transmission range: 1000 meters (RG59 coaxial cable)
- It can be connected video camera, multiplexer, VCR, DVR...etc.
- Power supply included.

Installation View:

CD102 (AC24V/DC12V)

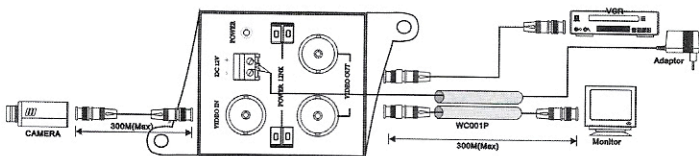


- When using multi distributors, a jumper is needed to extend power. (Max of 8 per power adapter)
Package includes a jumper for power loop.


BUY ON

www.cablematic.com


CD104 (AC24V/DC12V)




CD108




CD408/ CD408A




CD102A




CD816 / CD816A

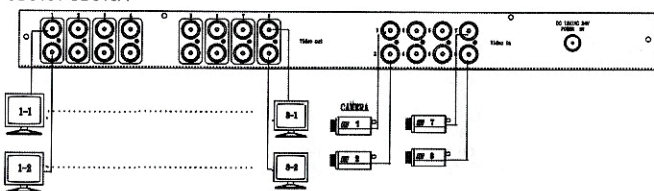


CD116

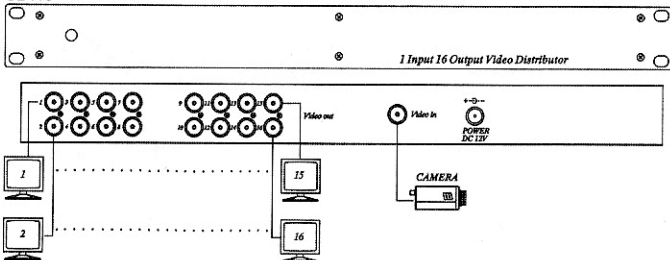


CD1664

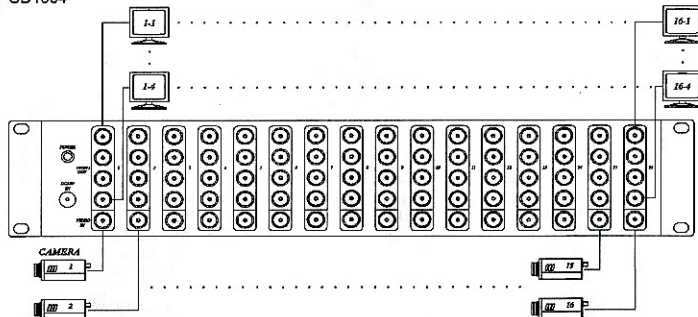


CD1632A

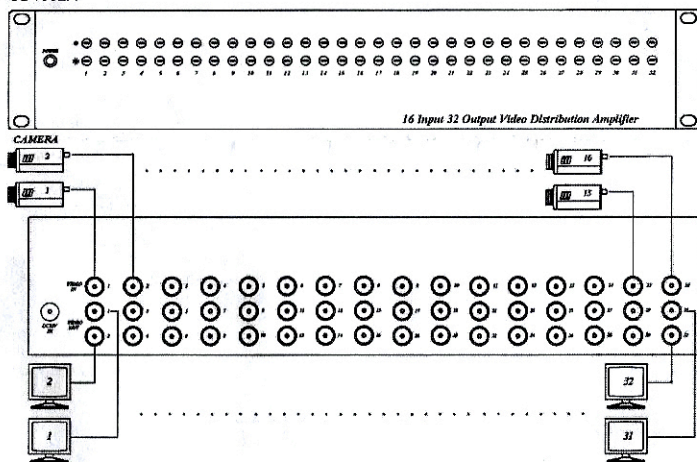


CA101



CA404

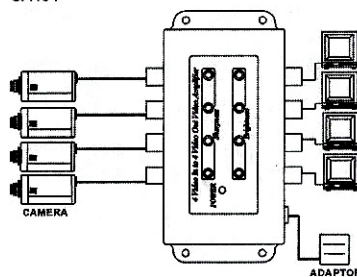

CA101A



Troubleshooting:

All transmission distances mentioned above are without connecting image processor (e.g. Quad, Multiplexer, DVR), the transmission range would be reduced 100-200 meters upon different camera, cable, DVR...ect.

1. When finish the installation, but no video signal, please check Power LED and power source.
2. Video signal is not normal; please check "+" and "-" of cable.

BUY ON

www.cablematic.com

Specifications:

ITEM NO.	CD102	CD104	CD108	CD408
Video Input Channel	BNC x 1	BNC x 1	BNC x 1	BNC x 4
Video Output Channel	BNC x 2	BNC x 4	BNC x 8	BNC x 8
Video Input Level	0.8~1.2Vp-p, 75 Ohms			
Video Output Level	1Vp-p (Standard), 75 Ohms			
Video Bandwidth	10hz - 10MHz			
Power Supply	DC12V 500mA / AC24V		DC12V / 500mA	
Power Consumption	40mA	100mA	150mA	150mA
Dimensions mm	43.2 x 74 x 45.2	138 x 85.6 x 29.5	133 x 87 x 44	133 x 145 x 44
Weight g	65	120	445	680

ITEM NO.	CD816	CD116	CD1664
Video Input Channel	BNC x 8	BNC x 1	BNC x 16
Video Output Channel	BNC x 16	BNC x 16	BNC x 64
Video Input Level	0.8~1.2Vp-p, 75 Ohms		
Video Output Level	1Vp-p (Standard), 75 Ohms		
Video Bandwidth	10hz - 10MHz		
Power Supply	DC12V 500mA / AC24V	DC12V / 500mA	DC12V / 1000mA
Power Consumption	250mA	250mA	800mA
Dimensions mm	483 x 185.2 x 44 (1U)	483 x 189 x 44 (1U)	483 x 110 x 88.4 (2U)
Weight g	2000	2035	2860

ITEM NO.	CD102A	CD408A	CD816A	CD1632A
Video Input Channel	BNC x 1	BNC x 4	BNC x 8	BNC x 16
Video Output Channel	BNC x 2	BNC x 8	BNC x 16	BNC x 32
Video Input Level	0.8~1.2Vp-p, 75 Ohms			
Video Output Level	1Vp-p (Standard), 75 Ohms			
Video Bandwidth	10hz - 10MHz			
Power Supply	DC12V / 500mA	DC12V / 500mA	DC12V 500mA / AC24V	DC12V/1000mA
Power Consumption	100mA	150mA	250mA	780mA
Dimensions mm	138 x 76.2 x 32	133 x 147.4 x 44	483 x 181.2 x 44(1U)	483 x 62 x 88.4(2U)
Weight g	110	720	2120	1610

ITEM NO.	CA101	CA101A	CA404
Video Input Channel	BNC x 1	BNC x 1	BNC x 4
Video Output Channel	BNC x 1	BNC x 1	BNC x 4
Audio Input Channel	x	RCA x 1	x
Audio Output Channel	x	RCA x 1	x
Video Input Level	0.8~1.2Vp-p, 75 Ohms		
Video Output Level	1Vp-p (Standard), 75 Ohms		
Video Bandwidth	10hz - 10MHz		
Transmission Range	1000 meters		
Power Supply	DC12V / 500mA		
Power Consumption	100mA	100mA	220mA
Dimensions mm	138 x 76.2 x 32	138 x 76.2 x 32	138 x 89 x 32
Weight g	100	105	145

Rev. C

BUY ON

www.cablematic.com