


FMC50M      FMD50M

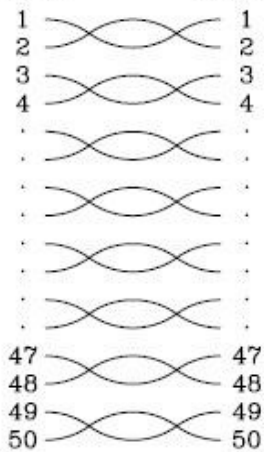

Length Unit:CM	Tolerance
< 50	± 2
50-100	± 3
101-150	± 4
151-300	± 5
301-500	± 6
> 500	± 10

Length Unit:CM

- 100% OPEN / SHORT / INSULATING TEST
- INSULATION TEST: 2M

COMPONENTS	DESCRIPTION	Q'TY
1 FMC50M	Half Pitch Centronic 50P Male Connector Shell: Steel Nickel Plated Insulator: Black P.B.T Contact: Phosphor Bronze 5μ" Gold Plated	2
2 FMD50M	Half Pitch D-SUB 50P Male Connector Shell: Steel Nickel Plated Insulator: Black P.B.T Contact: Phosphor Bronze 5μ" Gold Plating	2
3 Hood	Outer Hood: MPLN-50P ABS Color: Beige Inner Shell: Steel Nickel Plated	2
4 Latch	Spring Latches Stanless Steel Hood: ABS Color:Beige	4
5 Cable	UL2990 28AWG 25Twisted Pair Impedance 90Ω ±10Ω	1

2		
1		
NO.	DATE	MODIFICATION
		APPROVED BY:      DATE:
		CHECKED BY:      DATE:
		DESIGN BY:      DATE:
		PART NO:
		SCALE:      UNIT:      VERSION:
		X:1      mm      A
		DRAWN BY:      DRAWING NO:

SCSI Cable L : XXXXcm