


WIRE CONNECTION:

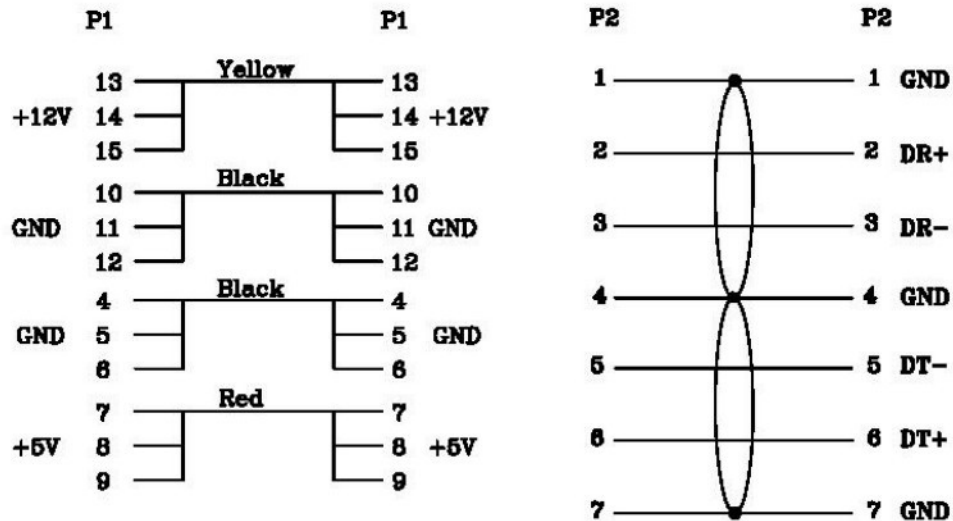

Unit:CM

L(length)	Part NO
30±1.0	9028-0021-1610210
46±1.5	9028-0031-1610310
50±1.5	9028-0041-1610410
61±2.0	9028-0051-1610510
75±2.0	9028-1001-1611010
91±2.5	9028-0061-1610610
100±2.5	9028-0071-1610710

9028-0XX1-161XX10

- 100% OPEN / SHORT / INSULATING TEST
- INSULATION TEST: 2MΩ

COMPONENTS	DESCRIPTION	Q'TY
1	SA15F Insulator :SPS UL94V-0 ,Black , Contact :Phosphor Bronze	2
2	SA07F Insulator:SPS UL94V-0,Black,Contact:Phosphor Bronze GOLD PLATED 15u"	2
3	Wire UL1007 18AWG (Color: BLACK X2 ,YELLOW X1 , RED X1) L : xxxxxxmm	4
4	HOOD PVC Molded Color: Black	2
5	CABLE (DER AN) SERIAL ATA CABLE, UL2725, (26AWG*2C+HMAM+2D)*2PCS. FLAT CABLE, Red COLOR, 2.2*7.5, Insulator Material: FM-PE	1

NO.	DATE	MODIFICATION
APPROVED BY:		DATE:
<i>Peter</i>		MAR. 07. 2007
CHECKED BY:		DATE:
<i>Chen</i>		MAR. 07. 2007
WT P/N: 9028-0XX1-161XX10		SALES: DATE:
CUSTOMER P/N:		
DESCRIPTION:		NAME:
Serial ATA Cable		SCALE: X1 UNIT: mm VERSION: A
DRAWN BY: <i>63CN MAR. 07. 2007</i>		DRAWING NO: 9028-0XX1-161XX10