

TECHNICAL SPECIFICATION

CABLE TYPE



RG-6/U CATV CABLE

STRUCTURE

Conductor	Composition(No./mm)	1/1.02mm	
	Material	Copper Covered Steel Wire	
	Outside Diameter (mm)	1.02±0.03mm	
Insulation	Material	Gas Injected Foamed Polyethylene	
	Thickness (mm)	1.78mm	
	Nom. Diameter(mm)	4.57± 0.15mm	
Shield	Material	(1) Bonded Aluminum Foil	(2) Aluminum Wire
	Construction	0.038mm	16*5/0.12mm
	Coverage	€0%	
	Diameter(mm)	5.08±0.05mm	
Jacket	Material	PVC	
	Diameter(mm)	6.9±0.15mm	
	Color	Black	

ELECTRICAL CHARACTERISTIC

Impedance	Ω	75 ±3						
Insulation Resistance	MΩ / km	1000 ↑						
Capacitance	pF/M	53 ±3						
Attenuation	Frequency(MHz)	300	400	600	865	1000	1450	2050
	dB/100M	11.64	12.63	16.73	18.54	21.49	26.5	33.10

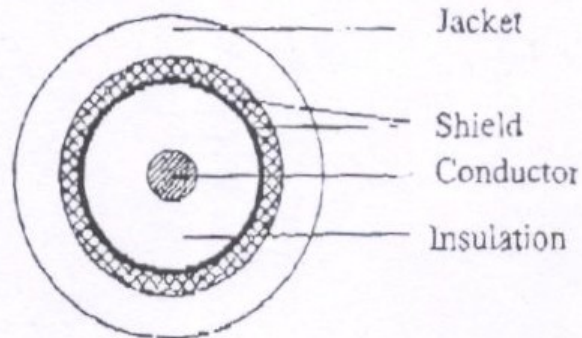

Nice Fountain Industrial Co., Ltd.

DRWN.

K.Y.WEI

DRWN. No.:

CHKD.

C.H.LIU

APPD.

VINCENT SHEN

Date: SEP.06, 2007