


Rev	Modification Content	Date	Validate
A	the First Edition	2007-11-22	Cindy

**ROHS**

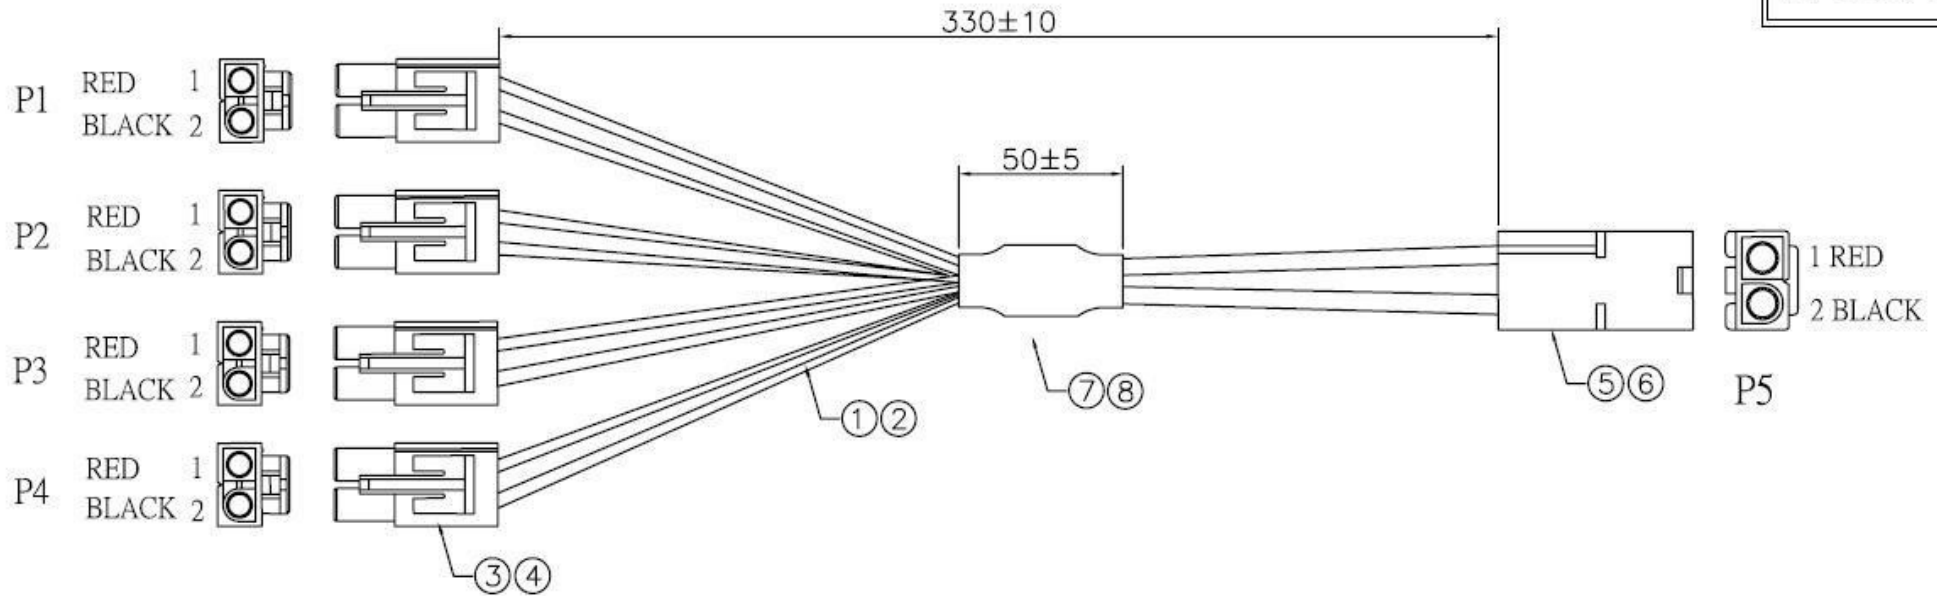

測試要求：

1. 成品需做100%電氣測試,不得有任何斷路/短路,錯位,電器閃爍.
2. 絕緣&導通阻抗:5M Ω /Min& 5 Ω /Max .
3. 測試電壓：DC 300V.

8	H.S.T	BLACK H.S.T Φ3.0mm*L:20mm	2 pcs
7	H.S.T	BLACK H.S.T Φ5.0mm*L:50mm	1 pcs
6	Terminal	SH2011T 2.0mm MALE TERMINAL	2 pcs
5	Housing	SH2011H-2P 空接2.0 2P FEMALE HOUSING	1 pcs
4	Terminal	SH2012T 2.0mm FEMALE TERMINAL	8 pcs
3	Housing	SH2012H-2P 空接2.0 2P MALE HOUSING	4 pcs
2	Cable	UL 1015 18AWG WIRE:BLACK*5	185mm
1	Cable	UL 1015 18AWG WIRE:RED*5	185mm

Pin Assignment:

	P1	P2	P3	P4	P5
1	RED	1	1	1	1
2	BLACK	2	2	2	2

P/N	4 to 1 Parallel Connectionr(1Male+3Female in parallel)(330MM L) 18AWG			
Item	HJ-141-071121 12			
Drawn By	Cindy	Customer NO.	NO	N
Audited By			Unit : mm	
Date	2007-11-22		Rev. : 1.00	ME

NO.	P/N	DESCRIPTION	QTY
-----	-----	-------------	-----