

HOT-PLUGGING AND ADVANCED MOUSE & KEYBOARD SUPPORT

4-port 19" Rackmount KVM Switch w/ Front-panel Buttons and Keyboard Hotkey Control

UKV-1480 Rackmount KVM Switch



This UKV-1480 KVM Switch is designed for computer/server management on a centralized single admin desk in corporate, factory as well as in campus computing environment. It also features a **hot-plugging** capability that allows you to plug off and on the KVM cabling without powering down a whole rack of servers, especially convenient when you are working on a server rack.

Robust and Reliable for Corporate Server Room / Industrial Floor


The UKV-1480 Rackmount KVM Switch is robust and durable in metal enclosure and provides better shielding against electromagnetic interference commonly seen in lab or factory environments. The metal case offers a sturdy protection needed to withstand accidental impact.

Centralized Rackmount Management

The UKV-1480 features a console port to connect your shared keyboard, video and mouse, and 4 PC ports to connect to your computers/servers. The rackmount design offers a neat placement of the KVM Switch units on the rack for centralized management and also for security enhancement that could be provided by a locked server room. You can simply place it on desktop or mount it on a standard 19" rack for more secured and centralized management.

Features

- 4-port 19" Rackmount KVM switch in metal enclosure
- PS/2 style keyboard and mouse control
- Support Microsoft IntelliMouse®, IntelliMouse Explorer®, Logitech NetMouse® and other compatibles
- Direct channel selection and operation using Front-panel push buttons and keyboard hotkeys
- Support for DOS, Windows 95/98/SE/ME/2000/XP, Linux, etc.
- Hot-plugging PCs for maintenance without powering down the KVM Switch or PCs
- Mouse reset hotkey for non-PnP OS such as Win NT 4.0 and Linux
- LED indicators for easy port status monitoring
- Plug-and-play, no Windows driver software needed for PS/2 keyboard and PS/2 operation
- Buzzer sound for port switching confirmation
- Autoscan mode for quick browsing of all connected computers
- Autoscan delay time programmable 5 ~ 100 seconds through hotkey commands
- High VGA resolution 2048 x 1536
- 19" rack mount design with metal enclosure for best shielding and protection

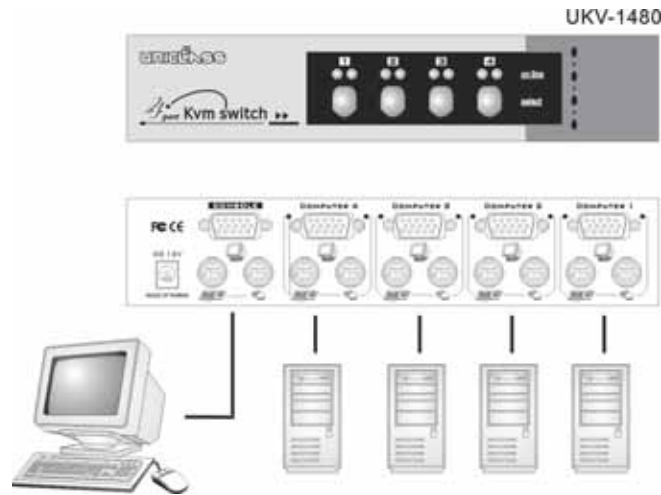

Specifications

Model No.	UKV-1480
PC Port	4
Console Port	1
PC Port Connectors	4 x PS/2 Keyboard 6-pin Mini Din female 4 x PS/2 Mouse 6 pin Mini Din female 4 x VGA HDB 15-pin Female
Console Port Connectors	1 x PS/2 Keyboard 6-pin Mini Din female 1 x PS/2 Mouse 6 pin Mini Din female 1x VGA HDB 15 pin female
PC selection	Push buttons / Hotkeys
PC port LED s	8
Scan delay time	5 ~ 100 sec. programmable through hotkey
Keyboard/Mouse emulation	PS/2
VGA Resolution	2048 x 1536
Power	PS/2 interface power
Operation Temperature	0 ~ 40°C
Storage Temperature	- 20 ~ 60°C
Humidity	0~90% RH, non-condensing
Size	Standard 19" rack mount
Housing	Metal enclosure
Dimension (L x W x H)	220 × 100 × 44.5 mm
Power Adapter	(Optional) DC 9V 1A
Weight	1000 g
Safety / Emission	FCC, CE