

OSD MENU CONTROL

4-port 19" Rackmount KVM Switch w/ Front-panel Buttons, Keyboard Hotkeys and OSD Control

UKV-048OSD Rackmount KVM Switch w/ OSD



The UKV-048OSD is a 4-port cascadable 19" Rackmount KVM Switch with OSD. It is designed to provide robust and reliable KVM switching performance under harsh and critical environment either in corporate office or on industrial floor.

OSD Menu offers more intuitive and convenient control

The full-feature OSD gives an intuitive menu-driven operation most users will find dispensable for a truly convenient experience.

Port-capacity scalable up to two hundred more computers via daisy-chaining multiple KVM Switch units


Multiple units (UKV-048OSD / UKV-088OSD / UKV-0168OSD) could also be daisy-chained up to 16 levels and provide a total port capacity of up to two hundred more of PCs (depending on the unit combinations).

Centralized Rackmount Management

The rackmount design offers a neat placement of the KVM Switch units on the rack for centralized management and also for security enhancement that could be provided by a locked server room.

Features

- 4-port Cascadable 19" Rackmount KVM switch with OSD
- Cascadable up to 16 levels using daisy-chain cable
- Port capacity scalable up to 244 PCs with multiple units in daisy-chained configuration
- PS/2 style keyboard and mouse control
- Support Microsoft IntelliMouse®, IntelliMouse Explorer®, Logitech NetMouse® and other compatibles
- Channel selection and operation using front-panel push buttons, keyboard hotkeys and OSD Menu
- Support for DOS, Windows 95/98/SE/ME/2000/XP, Linux, etc.
- Dual numerical LED displays and LED indicators for easy port status monitoring
- Buzzer sound for port switching confirmation
- Autoscan mode for quick browsing of all connected computers
- Autoscan delay time programmable from 5"~99" through OSD menu option
- Search PC by name
- Password protection
- High VGA resolution 1920 x 1440
- 19" rack mount design with metal enclosure for best shielding and protection

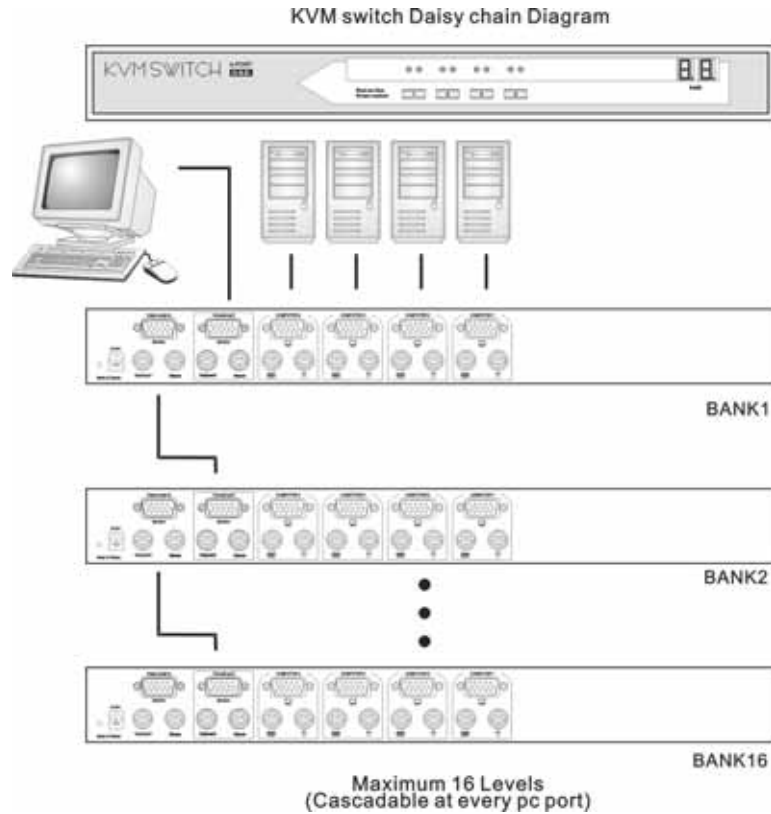

Specifications

Model No.	UKV-048OSD
PC Port	4
Console Port	1
Daisy-chain port	1
Daisy-chain level	Up to 16 levels
Max. PC Connection	244 PCs (1 x UKV-048OSD + 15 x UKV-0168OSD)
PC Port Connectors	4 x PS/2 Keyboard 6-pin Mini Din female 4 x PS/2 Mouse 6 pin Mini Din female 4 x VGA HDB 15-pin Female
Console Port Connectors	1 x PS/2 Keyboard 6-pin Mini Din female 1 x PS/2 Mouse 6 pin Mini Din female 1x VGA HDB 15 pin female
OSD	Yes
PC selection	Push buttons / Hotkeys / OSD
PC port LED s	8
Scan delay time	5 ~ 99 sec. programmable through OSD menu option
VGA Resolution	1920 x 1440
Humidity	0~90% RH, non-condensing
Size	Standard 19" rack mount
Housing	Metal enclosure
Dimension (L x W x H)	220 × 100 × 44.5 mm
Power	DC 9V 500mA (required)
Weight	1000 g
Safety / Emission	FCC, CE