

AUDIO&MIC + 4-PORT USB HUB

4-port USB PS/2 KVM Switch w/ Audio&Mic

UN72 USB PS/2 KVM Switch w/ Audio&Mic



The UN72 is a 4-port USB PS/2 KVM Switch with Audio and Microphone switching function. It allows you to control 4 USB-enabled multimedia computers using only one PS/2 (or USB) keyboard, mouse, monitor and a set of speakers and microphone.

Audio and Microphone Switching offers you uninterrupted multimedia experience with KVM Switching

The audio and microphone switching function allows you to leverage the multimedia systems on each of your multiple computers. You can monitor the audio/mic input/output of each of your computers without plugging on and off the audio/mic cables. And it takes only one set of speaker and microphone instead of one set for each computer.

USB interface compatibility to accommodate your USB keyboard and mouse


Since USB devices have gained tremendous popularity, it is a great advantage that you can share your USB devices. The UN72 provides a 4-port USB Hub to accommodate your USB keyboard, mouse and other USB devices.

Multi-platform support for PC and Macintosh

The UN72 offers multi-platform support for PC, Macintosh G3/G4, iMAC, thus allowing you to access, control, boot and reboot multiple USB-enabled multimedia computers using only one keyboard, video, mouse and a set of speakers and microphone.

Features

- 4-port USB PS/2 KVM switch with audio and microphone switching
- PS/2 & USB Keyboard and mouse support
- USB 1.1 Specification compliant
- UHCI, OHCI USB interface support
- Independent/simultaneous PC port selection/ USB hub port and/Audio&Mic channel selection
- Support for Windows 98/SE/ME/2000/XP and Linux
- Built-in 2-port USB hub for sharing USB devices
- Multi-platform support for PCs and Macintosh G3/G4 MACs, iMACs
- Hot-plugging PCs for maintenance without powering down the KVM Switch or PCs
- Channel selection/hub port control by front-panel push buttons and keyboard hotkeys
- LED indicators for easy status monitoring
- Buzzer sound for port switching confirmation
- High VGA resolution 1920 x 1440
- PS/2, USB interface power

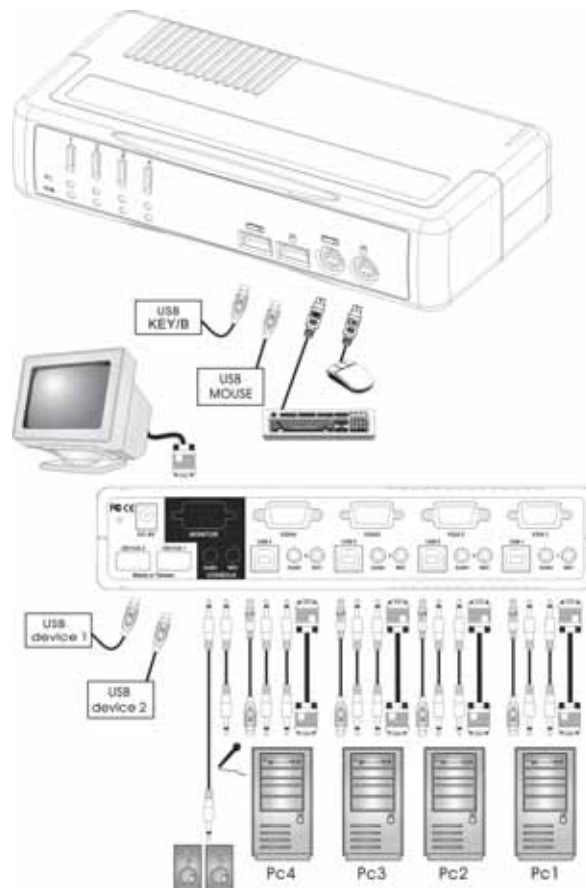

Specifications

Model No.	
PC Connections	4
Console Connections	1
PC Port Connectors	4 x USB Type B 4 x VGA HDB 15-pin Female 4 x 3.5mm audio in/out jack 4 x 3.5mm mic in/out jack
Console Port Connectors	4 x USB Type A (hub port for USB KB&MS and other USB devices) 1 x PS/2 Keyboard 6-pin Mini Din female 1 x PS/2 Mouse 6 pin Mini Din female 1x VGA HDB 15 pin female 1 x 3.5mm audio in/out jack 1 x 3.5mm mic in/out jack
On Screen Display	No
PC selection	Hotkey / Push buttons
PC port LED	4
Hub port LED	4
Scan delay time	5 ~ 60 sec. programmable (default = 5 sec.)
Keyboard/Mouse conversion	USB to PS/2
VGA Resolution	1920 x 1440
Power Type	PS/2, USB interface power
Power Adapter	(Optional) DC 9V 500mA
Operation Temperature	0 ~ 40°C
Size	Desktop
Housing	Plastic
Dimension (L x W x H)	220 × 105 × 45 mm
Weight	370 g
Safety / Emission	FCC, CE