


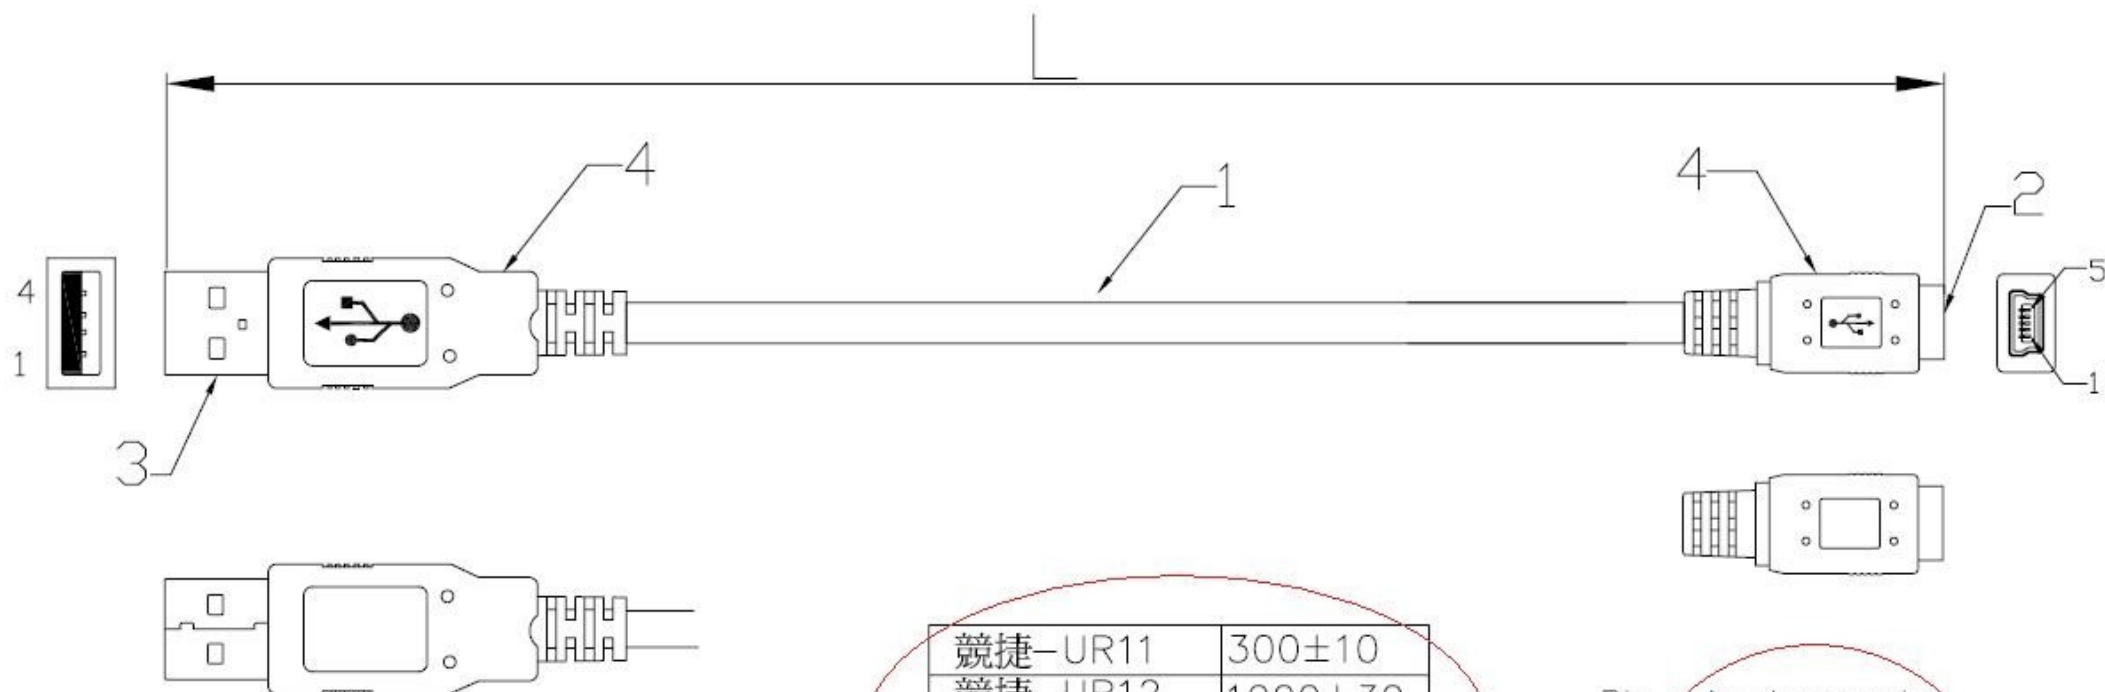

競捷-UR11	300±10
競捷-UR12	1000±30
競捷-UR13	1800±30
競捷-UR14	3000±50
競捷-UR15	5000±50

ELECTRONIC TEST:

- 1.OPEN/SHORT/INTERMITTE:100%.
- 2.INSULATION RESISTANCE:5MΩ
- 3.CONTACT RESISTANCE:10Ω.
- 4.HI-POT:300V/10MS

Pin Assignment			
AM	5P	ABF	COLOR
1	—	1	— RED
2	—	2	— WHITE
3	—	3	— GREEN
4	—	5	— BLACK
SHELL	—	SHELL	— BRAID

NO.	DESCRIPTION	Q'TY
1	CABLE: UL2725 1P*28AWG+2C*28AWG+AEB DD3.5 BLACK IN COLOR	1
2	MINI USB AB TYPE FEMALE SHELL PLATED:NICKEL CONTACT:G/F	1
3	USB A TYPE MALE SHELL PLATED:NICKEL CONTACT:G/F	1
4	55P PVC BLACK IN COLOR	1

UNLESS OTHERWISE SPECIFIED TOLERANCE ANG. ±5° 0. ±0.5 .0 ±0.3 .00 ±0.2		DRAWN NAME: 競捷-UR1X	
SCALE: NONE	UNIT: mm		
DRAWN Xing Fa	10/03/16		
CHECKED			
APPROVED	/ /	PRODUCT NO.	
DATE		FILE NAME:	

A		10/03/16
REV.	DESCRIPTION	DATE