


5M(B)

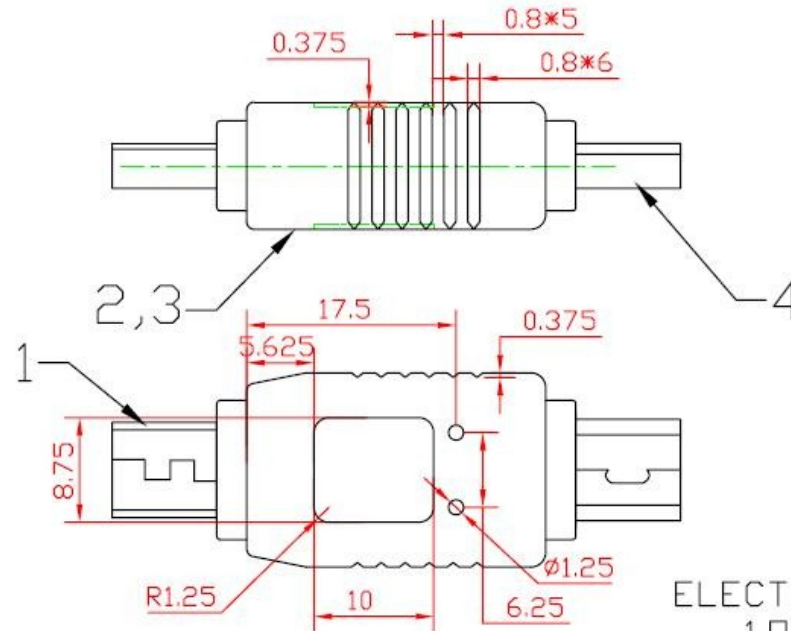

ELECTRONIC TEST:
 1.OPEN/SHORT/INTERMITTE:100%.
 2.INSULATION RESISTANCE:5MΩ
 3.CONTACT RESISTANCE:10Ω.
 4.HI-PDT:300V DTAGE.

PIN ASSENGMENT

MICRO BM — 5M

1 — 1

2 — 2

3 — 3

5 — 5

SHELL — SHELL

4	MINI USB 5P MALE B TYPE SHELL PLATED NICKEL CONTACT:G/F	PCS	1
3	INNER WIRE:UL1007 30AWG	PCS	
2	PVC 55P MOLD BLACK IN COLOR	SET	1
1	MICRO USB B TYPE MALE SHELL PLATED NICKEL CONTACT:G/F	PCS	1
NO.	DESCRIPTION	UNIT	QT'Y

UNLESS OTHERWISE SPECIFIED TOLERANCE		
ANG.	±5°	
0.	±0.5	
.0	±0.3	
.00	±0.2	
SCALE:	1:1	UNIT: mm
DRAWN	lych	09/08/11
CHECKED	Xing Fa	09/08/11
APPROVED		
DRAWN NAME:		競捷 US94
PRODUCT NO.		
DATE	09/08/11	FILE NAME:
SIZE	A4	REV. A

REV.	DESCRIPTION	DATE
A		09/08/11