



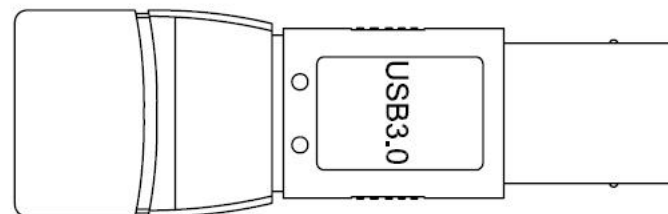
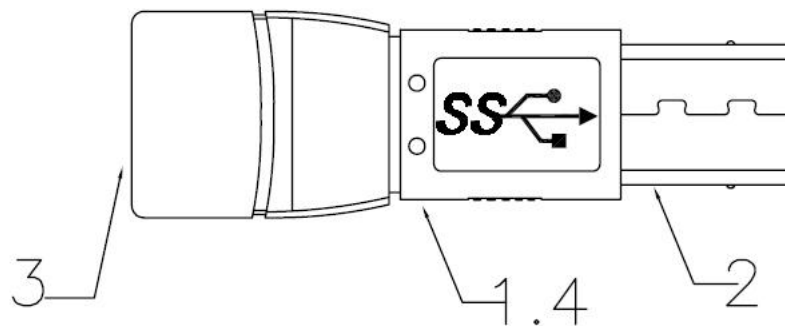




USB3.0 AF



USB3.0 BM



USB3.0 AF USB3.0 BM

- | | | |
|---|---|---|
| 1 | — | 1 |
| 2 | — | 2 |
| 3 | — | 3 |
| 4 | — | 4 |
| 5 | — | 5 |
| 6 | — | 6 |
| 7 | — | 7 |
| 8 | — | 8 |
| 9 | — | 9 |

SHELL — SHELL

ELECTRICAL PROPERTIES:

1. 100% OPEN SHORT MIS-WIRE TEST
2. Contact Resistance:10ohm
3. Insulation Resistance:5Mega ohm
4. Hipot test:DC 300V/10ms

4	55P PVC MOLDING BLUE IN COLOR		
3	USB3.0 A TYPE FEMALE SOLDER SHELL PLATED NICKEL CONTACT:30U"	1	pcs
2	USB3.0 B TYPE MALE SOLDER SHELL PLATED NICKEL CONTACT:30U"	1	pcs
1	INTERNAL WIRES;UL1007 30AWG 7STRAND L:17MM		
NO.	DESCRIPTION	Q'TY	UNIT
A			
REV.	DESCRIPTION	DATE	

UNLESS OTHERWISE SPECIFIED TOLERANCE			
ANG.	±5°		
0.	±0.5		
.0	±0.3		
.00	±0.2		
SCALE:	NONE	UNIT:	mm
DRAWN	Steven	10/09/23	DRAWN NAME:
CHECKED	eric	10/09/23	競捷-UY07
APPROVED			PRODUCT NO.
			FILE NAME: