


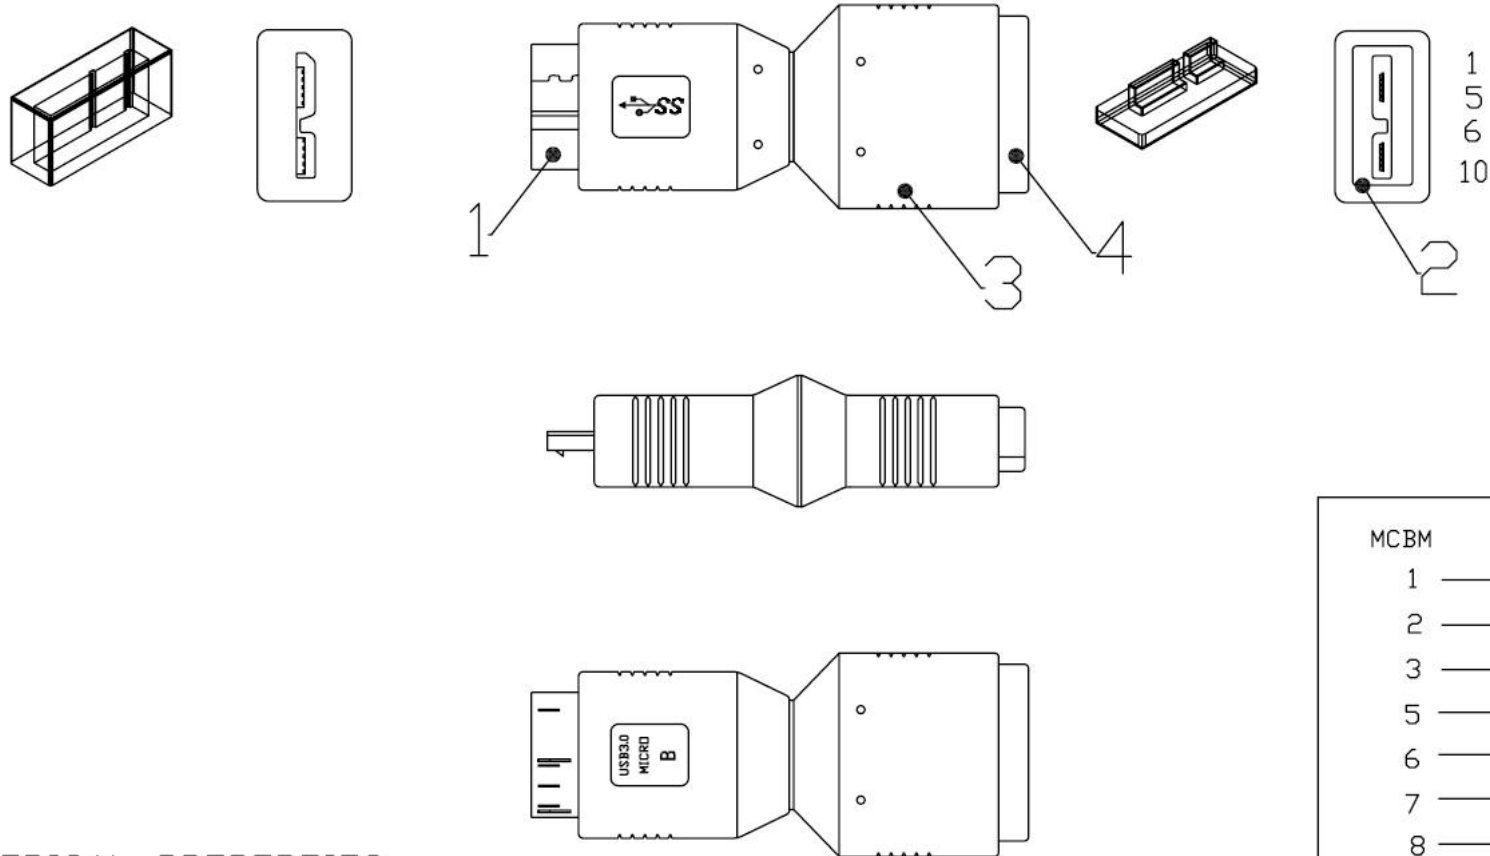

ELECTRICAL PROPERTIES:

1. 100% OPEN SHORT MIS-WIRE TEST
2. CONTACT RESISTANCE:100 Ω M
3. INSULATION RESISTANCE:5MEGA Ω M
4. HIPOT TEST:300V/10MS

MCBM	MC	F	COLOR
1	1	1	RED(PWR)
2	2	2	WHITE(UTP_D-)
3	3	3	GREEN(UTP_D+)
5	5	5	BLACK(GND_PWRrt)
6	6	6	YELLOW(SDP1-)
7	7	7	BLUE(SDP1+)
8	8	8	DRAIN(SDP1_Drain) (SDP2_Drain)
9	9	9	ORANGE(SDP2-)
10	10	10	PURPLE(SDP2+)
SHELL	SHELL	SHELL	BRAID

4	ABS MOLD BLACK IN COLOR	1	pcs
3	55P PVC MOLDING BLUE IN COLOR	1	pcs
2	USB3.0 MICRO A+B TYPE FEMALE SHELL PLATED:NICKEL CONTACT:30U"	1	pcs
1	USB3.0 MICRO B TYPE MALE SHELL PLATED:NICKEL CONTACT:30U"	1	pcs
DESCRIPTION		Q'TY	UNIT

A		10/09/23	APPROVED	PRODUCT NO.
REV.	DESCRIPTION	DATE	SIZE A4 REV. A	FILE NAME:

UNLESS OTHERWISE SPECIFIED TOLERANCE			
ANG.	±5°		
0.	±0.5		
.0	±0.3		
.00	±0.2		
SCALE:	NONE	UNIT:	mm
DRAWN	Steven	10/09/23	DRAWN NAME:
CHECKED	Eric	10/09/23	競捷 UY16