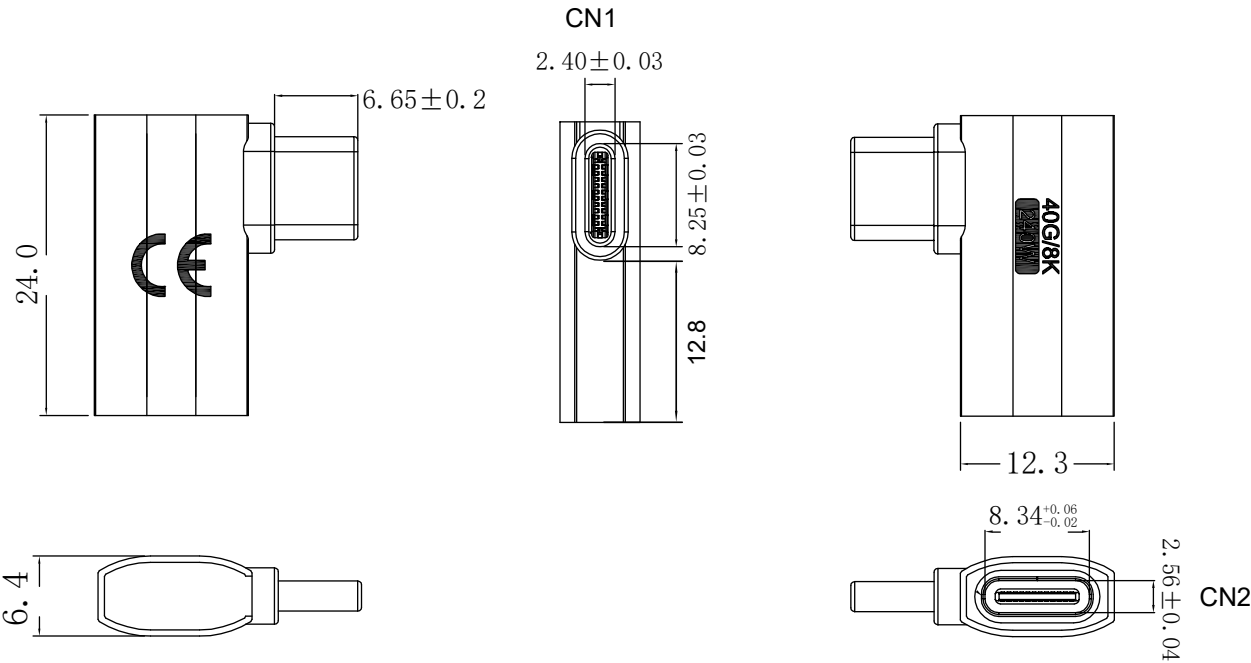


	1	2	3	4	5	6	7	8	9	10	11	12	13	14	
A	PIN-Belegung / PIN Assignment CN1 CN2 A1 A12 B1 B12 A4 A9 B4 B9 A2 A3 A5 A6 A7 A8 A10 A11 B2 B3 B5 B6 B7 B8 B10 B11 SHELL A1 A12 B1 B12 A4 A9 B4 B9 A2 A3 A5 A6 A7 A8 A10 A11 B2 B3 B5 B6 B7 B8 B10 B11 SHELL														A
B															B
C															C
D															D
E															E
F					USB-C™-Adapter horizontal 90°, USB4™ - Sorgt für eine platzsparende Kabelführung - Hochwertiges, robustes Metallgehäuse - Kompatibel mit USB 3.1, USB 2.0, Thunderbolt™ 3 und Thunderbolt™ 4					USB-C™ Adapter Horizontal 90°, USB4™ - Ensures space-saving cable routing - High-quality, robust metal housing - Compatible with USB 3.1, USB 2.0 as well as Thunderbolt™ 3 and Thunderbolt™ 4					F
G					Anschlüsse: USB-C™-Buchse, USB-C™-Stecker Kontakte: PINs: vergoldet Material Gehäuse: Innen: PVC 45P, schwarz Außen: Aluminiumlegierung Max. Auflösung: 8K @ 60 Hz Max. Datenübertragungsrate: 40 Gbit/s Leistung: Max. 240 W (48 V ; 5A) Isolationswiderstand: 300 V/10ms ---, ≥10 MΩ					Connectors: USB-C™ socket Contacts: USB-C™ plug Material housing: Inside: PVC 45P, black Outside: Aluminium alloy Max. resolution: 8K @ 60 Hz Max. data transmission rate: 40 Gbit/s Power: Max. 240 W (48 V ; 5A) Insulation resistance: 300 V/10ms ---, ≥10 MΩ					G
H															H
I	Änderungen				Datum Name				Bezeichnung				Blatt		I
J	Datum Name 28.08.2024 alw				gez.: 25.07.2024 alw gepr.: 25.07.2024 alw Norm:				USB-C 4.0 240W 40G 90° Adapter Flach F-M Zeichnungs-Nr.:				1/1 von		J
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	