


Rev	Modification Content	Date	Validate
A	the First Edition	2009-08-13	Cindy

ROHS

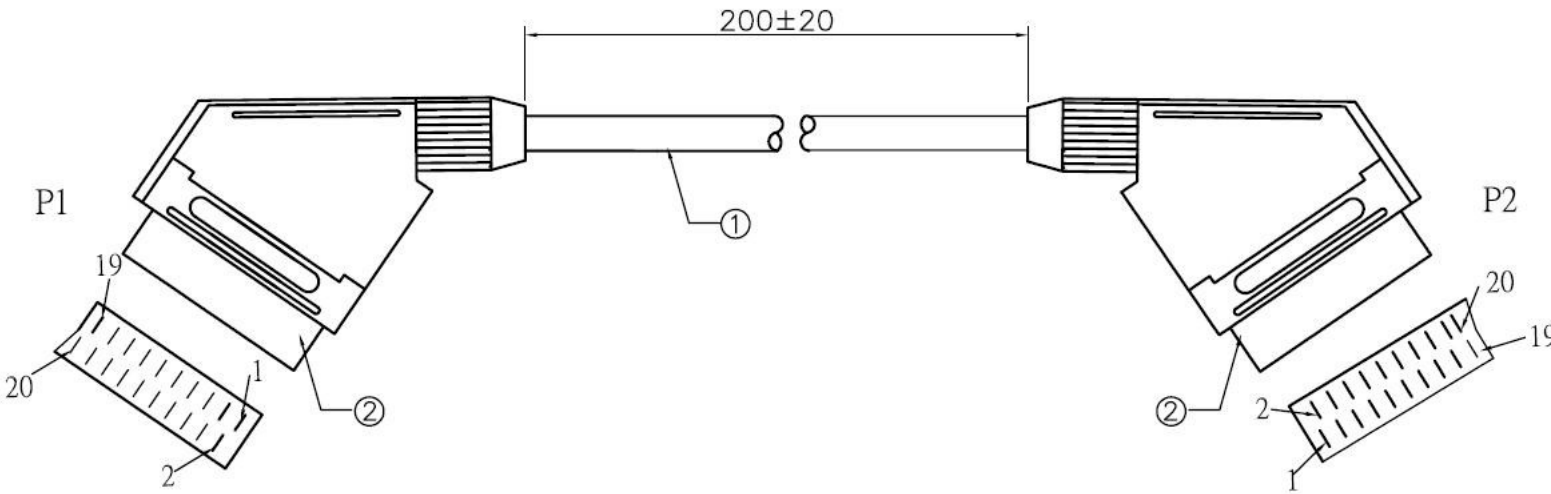

Pin Assignment:

P1	P2	P1	P2
1 BLACK	2	11 LIGHT BROWN	11
2 BROWN	1	12 LIGHT RED	12
3 RED	6	13 LIGHT ORANGE	13
4 ORANGE	4	14 LIGHT YELLOW	14
5 YELLOW	5	15 LIGHT GREEN	15
6 GREEN	3	16 LIGHT PURPLE	16
7 BLUE	7	17 LIGHT GRAY	17
8 PURPLE	8	18 BROWN BLACK	18
9 GRAY	9	19 RDE BLACK	20
10 WHITE	10	20 ORANGE BALCK	19
		S YELLOW BLACK	S

ELECTRICAL TEST:

- 1)100% OPEN SHORT&MISS WIRE TEST
- 2)INSULATION RESISTANCE:DC300V 5M OHM
- 3)CONDUCTOR RESISTANCE:5 OHM

PACKING:

1. 單PCS包裝.

5	Carton	46*30*23CM K=K紙箱印"HJ" 紅色字體	pcs
5	Clapboard	45*29CM B=B	2 pcs
4	PE Bag	(19"+13")*27"*0.05mm	pcs
3	PE BAG	150*200*0.06MM	1 pcs
2	Connector	SCART 20P 公頭 殼鍍鎳 焊線式+SCART 裝配殼	2 set
1	Cable	UL 2464 28AWG*20C+AE OD7.0mm JACKET:BLACK	200mm
NO.	P/N	DESCRIPTION	QTY

P/N	SCART 20PM/M 內長:20CM		
Item	HJ-141-VC40		
Drawn By	Cindy	Customer NO.	NO
Audited By		Unit : mm	⊕
Date	2009-08-13	Rev. : 1.00	ME