


Rev	Modification Content	Date	Validate
A	the First Edition	2009-11-12	Cindy

ROHS

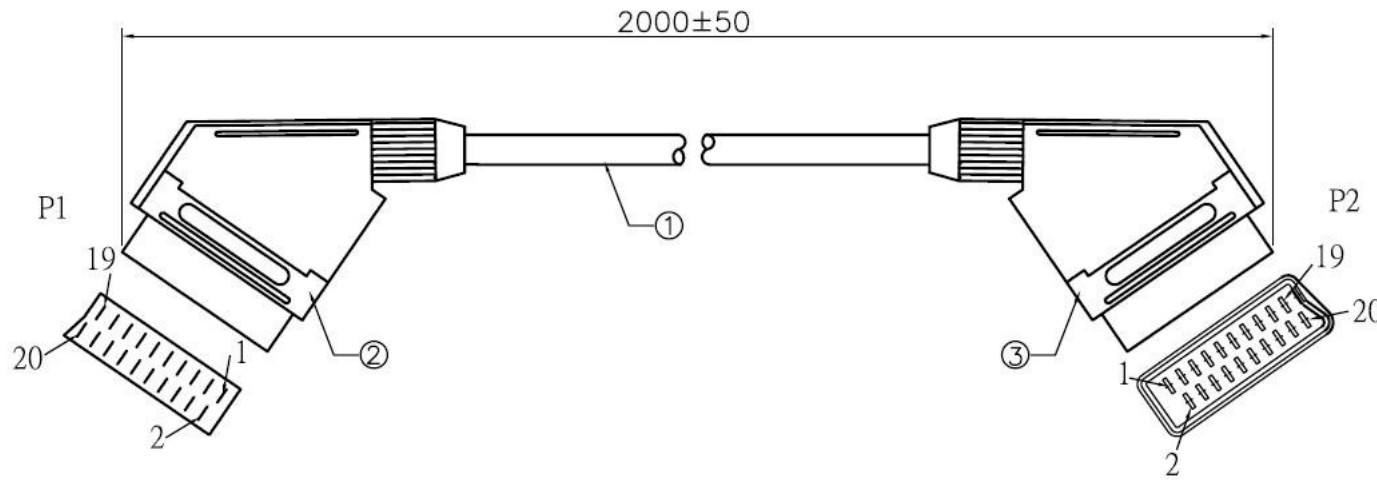

Pin Assignment:

P1	P2	P1	P2
1 BLACK	1	11 LIGHT BROWN	11
2 BROWN	2	12 LIGHT RED	12
3 RED	3	13 LIGHT ORANGE	13
4 ORANGE	4	14 LIGHT YELLOW	14
5 YELLOW	5	15 LIGHT GREEN	15
6 GREEN	6	16 LIGHT PURPLE	16
7 BLUE	7	17 LIGHT GRAY	17
8 PURPLE	8	18 BROWN BLACK	18
9 GRAY	9	19 RDE BALCK	19
10 WHITE	10	20 ORANGE BLACK	20
		S YELLOW BLACK	S

ELECTRICAL TEST:

- 1)100% OPEN SHORT&MISS WIRE TEST
- 2)INSULATION RESISTANCE:DC300V 5M OHM
- 3)CONDUCTOR RESISTANCE:5 OHM

PACKING:

- 1)單PCS包裝,在PE袋上貼環保標籤.

7	Carton	46*30*23CM K=K	pcs
6	Clapboard	45*29CM B=B	2 pcs
5	Connector	(19"+13")*27"*0.05mm	pcs
4	PE Bag	150*200*0.06MM	1 pcs
3	Connector	SCART 20P 母頭 鍍殼鍍鎳 焊線式+SCART 裝配殼	1 set
2	Connector	SCART 20P 公頭 鍍殼鍍鎳 焊線式+SCART 裝配殼	1 set
1	Cable	UL 2464 28AWG*20C+AE OD7.0mm BLACK JACKET	1 pcs
NO.	P/N	DESCRIPTION	QTY

P/N	SCART 20PM/F 2M			
Item	HJ-141-091112-01			
Drawn By	May	Customer NO.	NO	N
Audited By			Unit : mm	
Date	2009-11-12		Rev. : 1.00	ME