

USER MANUAL


4K HDMI+Audio Converter

Enjoy the vivid world



Product introduction:

This HDMI to HDMI+audio converter converts the HDMI video signal to displayer/ projector, and converts the stripped digital audio signal via the Optical/ Coaxial audio output to amplifier or speaker, the stripped analog audio signal via output to the headset, So that audio and video can be separated. The resolution of this converter can be up to 4096X2160/30Hz.

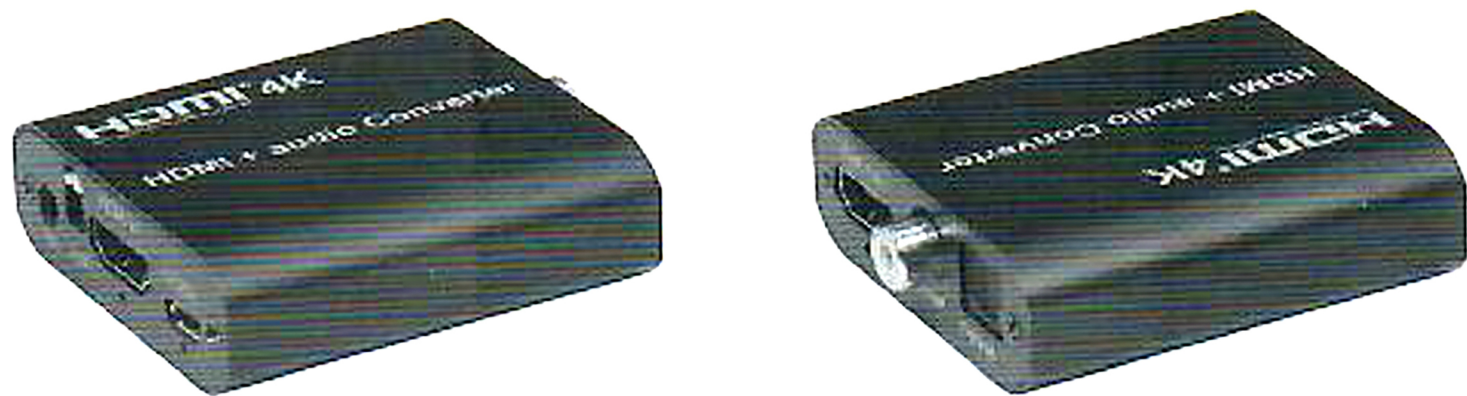

Features:


- * Support 3D video format;
- * Support left and right channel output;
- * Support optical output;
- * Support coaxial output.

Specifications:

HDMI resolution	up to 4096*2160/30Hz
Support video format	8/10/12 bit deep color
Support audio format	DTS-HD/Dolby-trueHD/DTS/Dolby-AC3/DSD
Max bandwidth	300MHz
Max baud rate	3Gbps
Input cable distance	≤8m AWG26 HDMI standard cable
Output cable distance	≤8m AWG26 HDMI standard cable
Max working current	0.3A
Power adapter format	input AC (50HZ, 60HZ) 100V-240V; output: DC5V/1A
Operating Temperature range	(-15 to +45℃)
Dimension (L x W x H)	62x59x19 (mm)
Weight	48.5g



Application diagram:

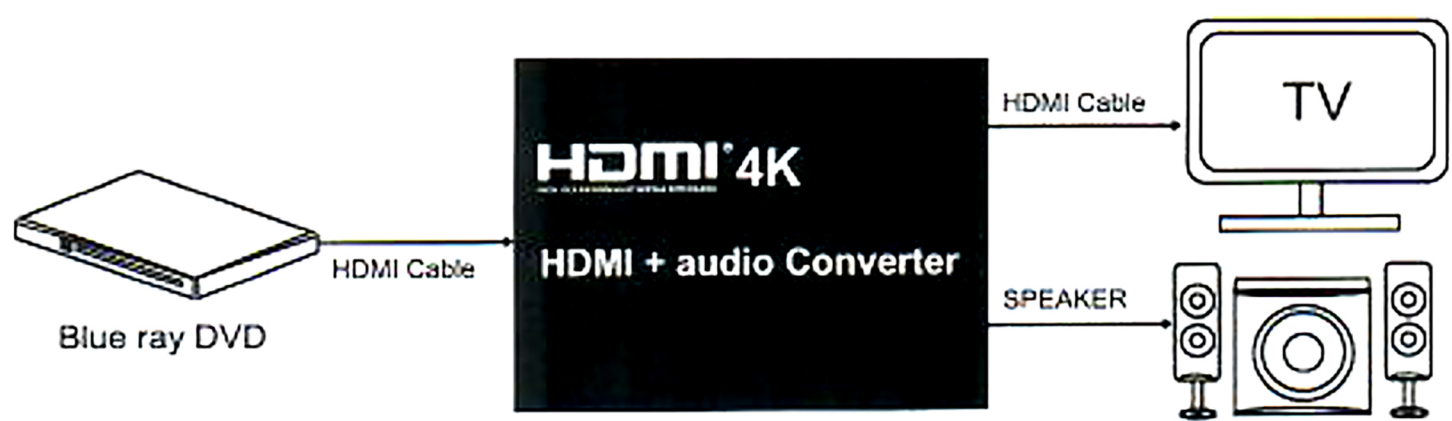

Connection and Operation:

- 1: Connect the UHD signal source to this converter with one HDMI cable.
- 2: Connect this converter to the display with one HDMI cable.
- 3: Connect 5V/1A power adapter to the converter.
- 4: Connect the amplifier using optical fiber or coaxial cable.
- 5: DIP: EDID management.

EDID Settings:

1	2	Description
0	0	Copy HDMI out EDID
0	1	1080P 3D 2ch EDID
1	0	4K 2 ch EDID
1	1	2D 1080P 5.1 ch EDID

Package include:

- | | |
|-------------------------|------|
| 1. HDMI+audio converter | 1PCS |
| 2. Micro USB cable | 1PCS |
| 3. User manual | 1PCS |

