

User Manual




I. Specifications:


- | | |
|---|--|
| Working temperature: -20-60 °C | Supply voltage: DC12-24V |
| Product size: L102*W65*H25mm | Net weight:105g |
| Package size: L135×W72×H40mm | Gross weight:125g |
| Output: Three CMOS drain- open output | |
| Connecting Mode: Common anode | ☒ cathode ☐ |
| Max load current: 4 A ☒ 8A ☐ | each color |

II. .Panel specification and connecting drawing as follows:

Application Circuit1-Serial connection:

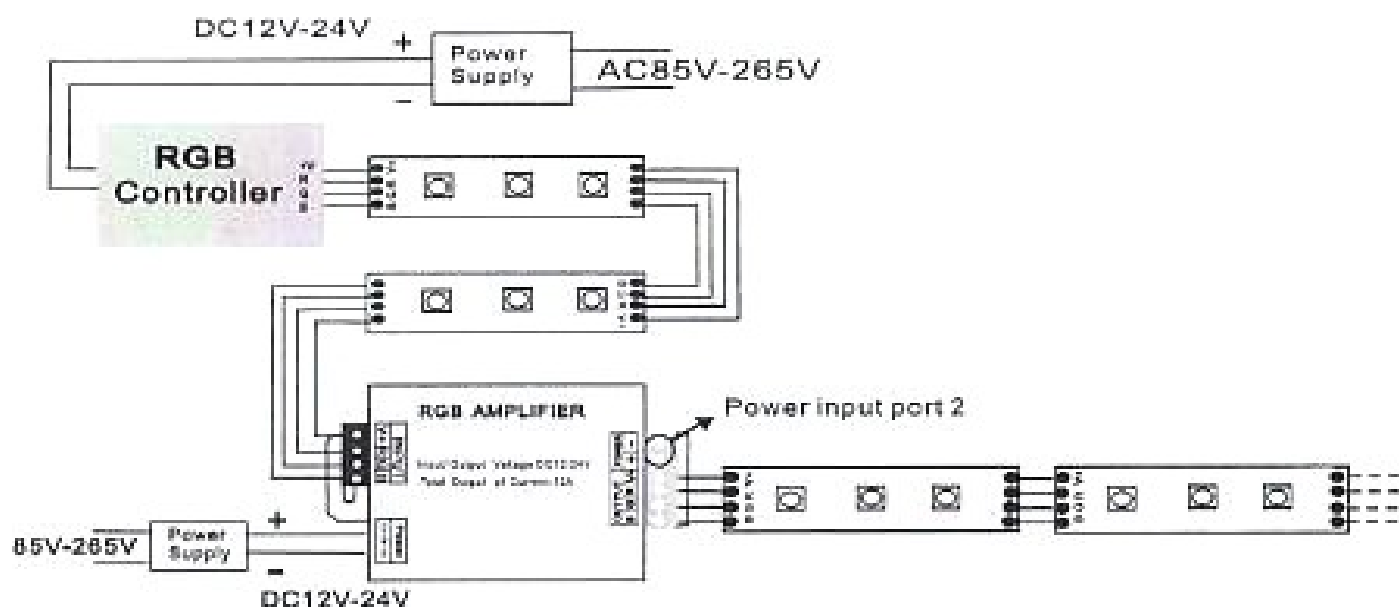

Application Circuit2- Parallel connection:

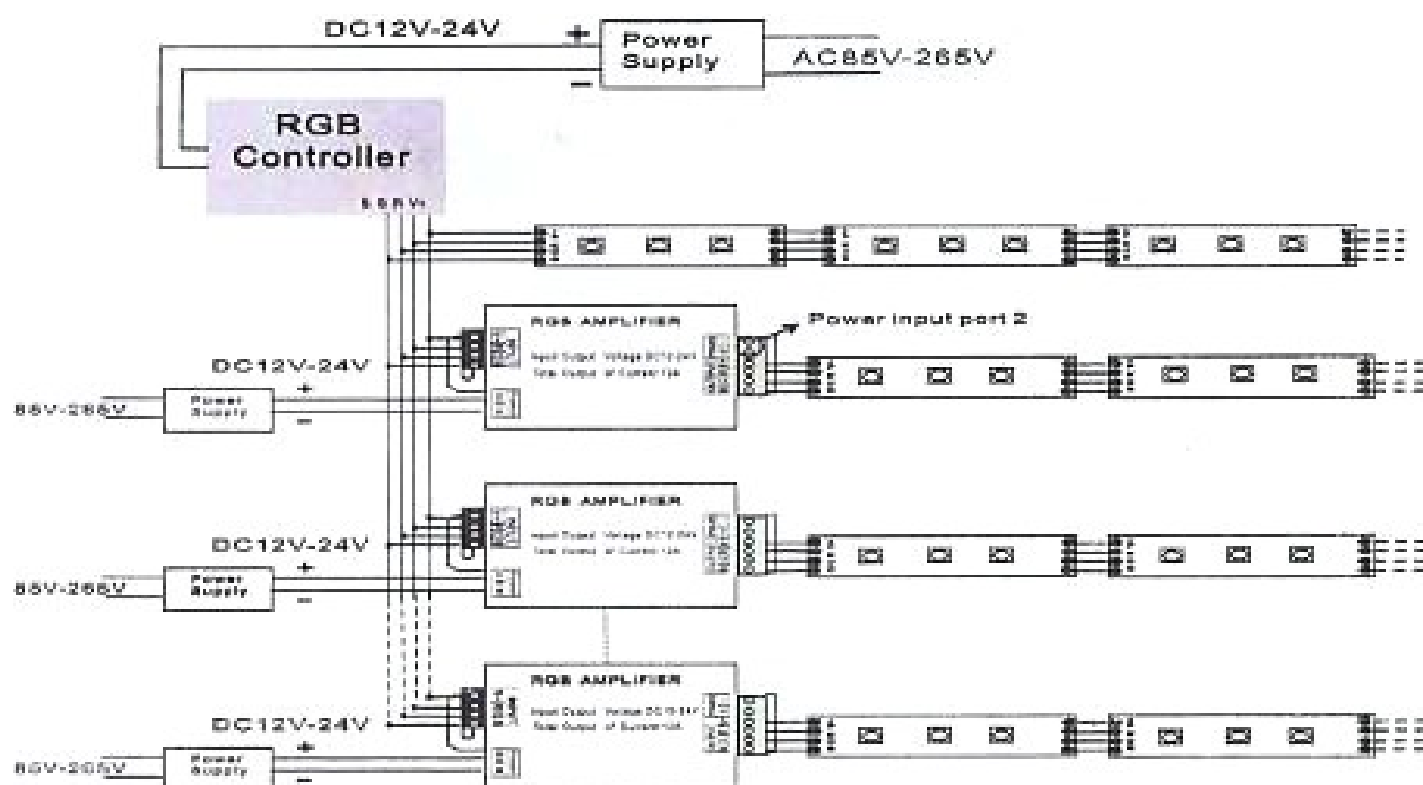

III. Warning:

1. Supply voltage of this product is DC12-24V , never connect to AC110V or AC220V.
2. Never connect two wires directly in case of short circuit.
3. Lead wire should be connected correctly according to colors that connecting diagram offers.
4. Warranty of this product is one year, but exclude the artificial situation of damaged or overload working