
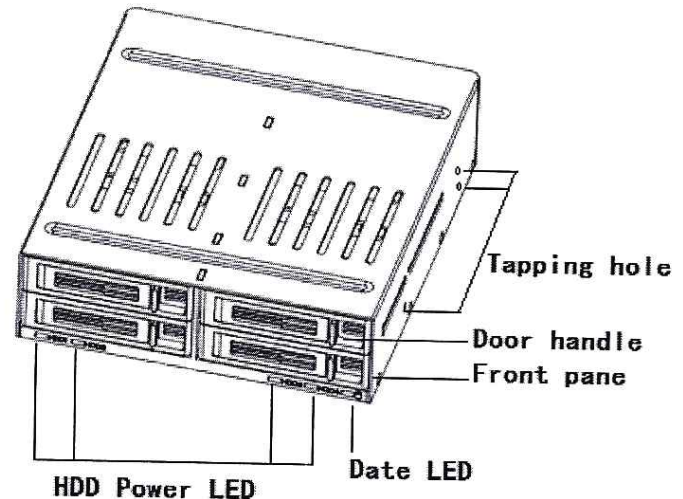


Product Instruction

Simply to extend and add more storage media in your digital life—extra 4 x 2.5" SATA HDD/ SSD slot in 5.25" size front bays. To save more data, music, video, personal photos, ect. To backup more important data.

Features:

- *Support 4*2.5" SATA I/II/III HDD& SSD;
- *It is fixed in the 5.25" CD-ROM slot of the Desktop
- *Easy installation
- *Hot swap (if built-in SATA port on MB supported) available
- *Embedded FAN increases the efficiency of heat dissipation
- *Power LED/ HDD R/W LED indication

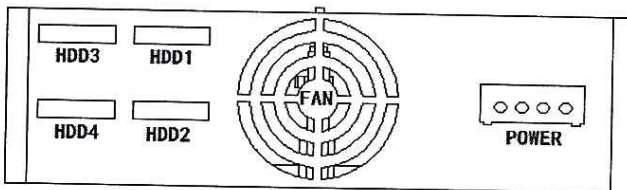

Specification:


Measurement of the product	146*42*170mm
Measurement of the fan	40*40*10mm
RPM of fan	4000RPM
Available Hard Disk	2.5inches of SATA I/II/III HDD and SSD
Material of the product	Alloy Aluminum and ABS
Interface	SATA
Data transfer speed	SATA1 (1.5Gbps) /SATA2 (3.0Gbps) /SATA3 (6.0Gbps)
LED	4 Green LED: POWER / 1Red LED DATA Transfer
OS supported	WIN98 /2000/XP/7/VISTA/8&MAC OS
Accessories	product*1 user manual*1 SATA cable*4 screws for HDD*16 screws for product*6

Installation:


- 1、 Turn off the power of Desktop before installation
- 2、 Remove the front panel of 5.25" slot
- 3、 Insert INH425 into the proper position of the 5.25" slot
- 4、 After adjusting the product to the right position, to use the screws to fix the product with PC 5.25" tray tightly.
- 5、 Connect the SATA 7PIN to the SATA slot of Motherboard
- 6、 Connecting the 4PIN power cable of the power supply to the product (Note: To check the direction of the 4PIN cable before connection with product)
- 7、 Assemble the PC case with the product and INH425 can be used.

HDD installation:


- 1、 Push the lock of the HDD tray and remove the tray out for HDD installation

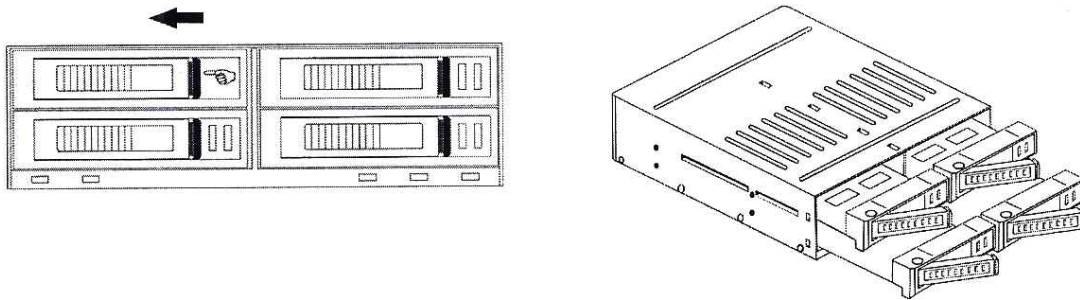

- 2、 Put the HDD on the tray and screws HDD with the tray

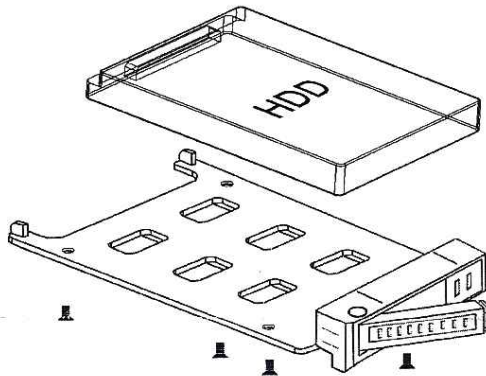

- 3、 Insert the HDD with Tray into the product

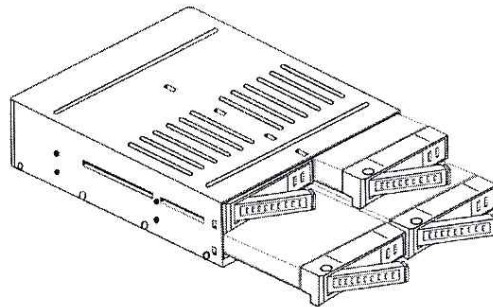

Warning:

- ! Please do make sure the SATA port of your Motherboard support Hot-Swap function if you would like to remove or change the HDD during PC operation.
- ! Don't remove the HDD during data transfer.
- ! To double check the direction of the 4PIN cable before connection with product

