



Rev	Modification Content	Date	Validate
A	the First Edition	2006-09-01	Cindy

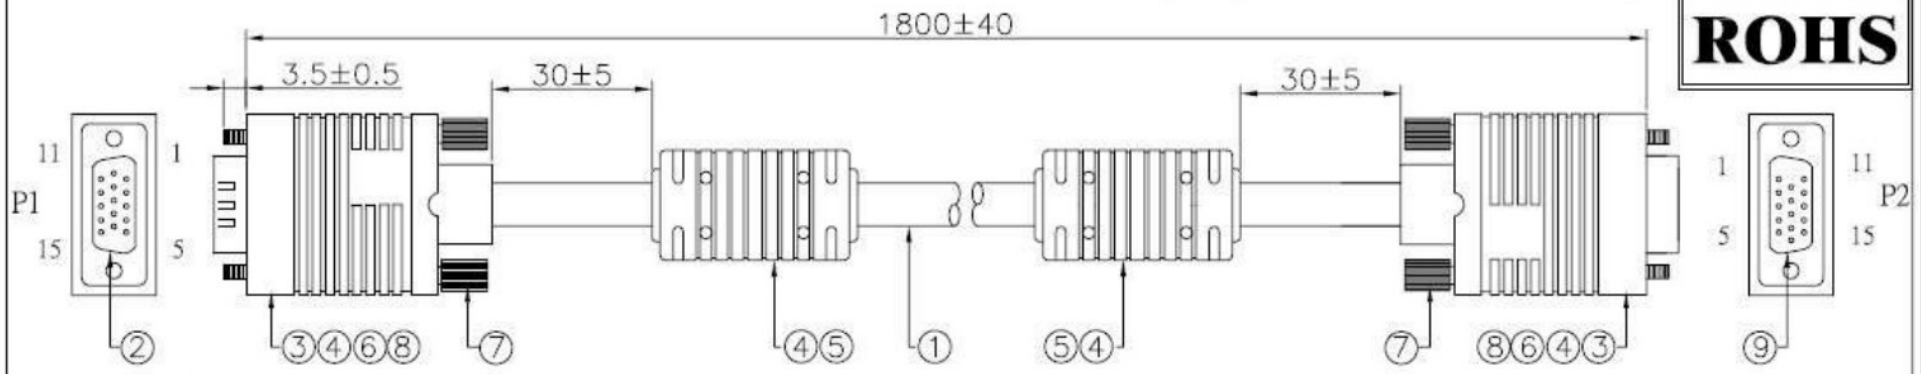

**ROHS**

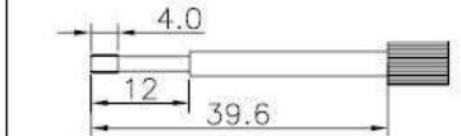


9	Connect	HD-SUB15P FEMALE(BLACK), PIN GOLD 前鍍後錫	1 pcs
8	Foil-Cu	W30*L60*0.06mm	2 pcs
7	Screw	ABS 4#-40UNC A14.0*39.6 BLACK CO.5*45°	4 pcs
6	Tube	BLACK PYROCONDENSATION TUBE OD=2.0mm L=8mm	6 pcs
5	Magnetic Core	17.5mm*28.5mm*9.5mm	2 pcs
4	Molding Out	PVC COLOR: BLACK BKCS-5114-55P	81 g
3	Molding In	PVC Molding In	6.5 g
2	Connect	HD-SUB15P MALE(BLACK),PIN GOLD FULL PIN,前鍍後錫	1 pcs
1	Cable	UL2919{ [28AWG(7/0.127)*1C +(38/0.12)SPIRAL]*3C+28AWG*9C+AL /MY+DW(7/0.203)+50%BD(16/5/0.10) BLACK 亮面齒狀 OD=8.0±0.2mm	1800mm
NO.	P/N	DESCRIPTION	QTY

**Pin Assignment:**

P1	RED	P2	1
1	RED SHIELD	6	6
6	GREEN	2	2
2	GREEN SHIELD	7	7
7	BLUE	3	3
3	BLUE SHIELD	8	8
8	BROWN	4	4
4	RED	5	5
5	ORANGE	9	9
9	YELLOW	10	10
10	GREEN	11	11
11	BLUE	12	12
12	PURPLE	13	13
13	BLACK	14	14
14	WHITE	15	15
15	BRAID	SHELL	SHELL
	D.W		

**Packing:**

1. PACKING METHOD LIKE LETTER "O", BLACK TIE;
2. PE BAG: 200mm\*250mm\*0.04mm;
3. CARTON: 460mm\*300mm\*230mm A=A, CARTON MAKE OUT: 2919 (3+9).



P/N	VGA CABLE 2919 (3+9) 1.8M M/F		
Item	ARB1511529030180		
Drawn By	Cindy	Customer NO.	NO N
Audited By		Unit: mm	
Date	2006-09-01	Rev.: 1.00	ME