



Rev	Modification Content	Date	Validate
A	the First Edition	2006-09-01	Cindy

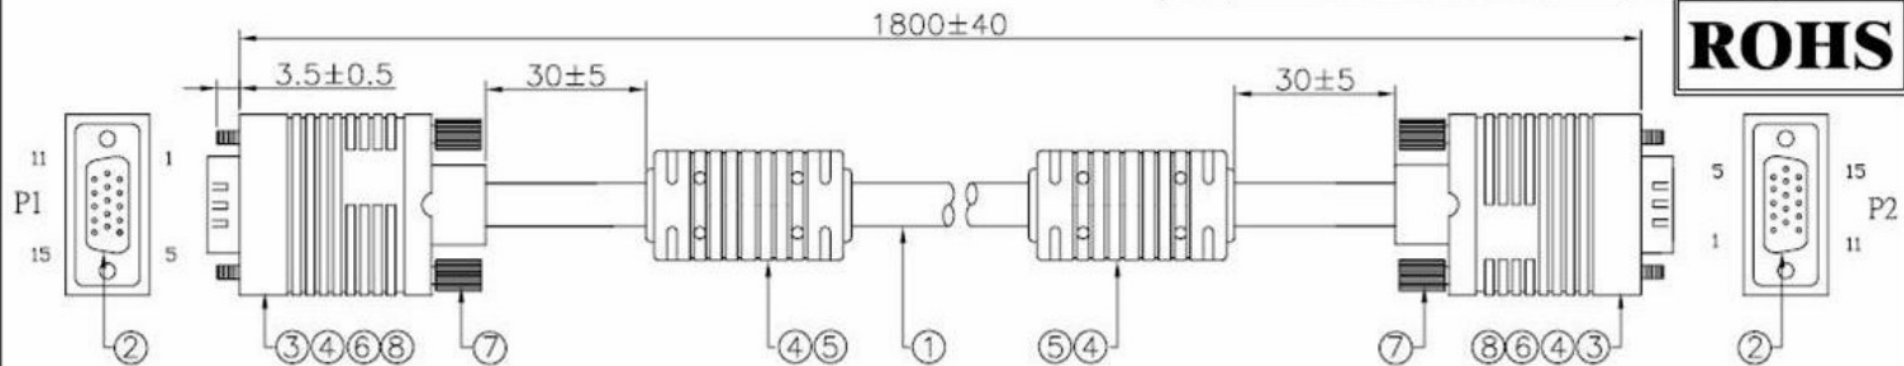

ROHS

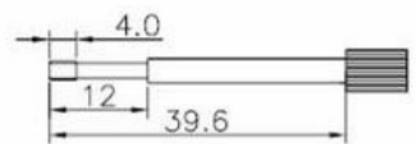


8	Foil-Cu	W30*L60*0.06mm	2 pcs
7	Screw	ABS 4#-40UNC A14.0*39.6 BLACK C0.5*45°	4 pcs
6	Tube	BLACK PYROCONDENSATION TUBE OD=2.0mm L=8mm	6 pcs
5	Magnetic Core	17.5mm*28.5mm*9.5mm	2 pcs
4	Molding Out	PVC COLOR: BLACK BKCS-5114-55P	81 g
3	Molding In	PVC Molding In	6.5 g
2	Connect	HD-SUB15P MALE(BLACK),PIN GOLD, FULL PIN,前鍍後錫	2 pcs
1	Cable	UL2919([28AWG(7/0.127)*1C +(38/0.12)SPIRAL]*3C+28AWG*9C+AL /MY+DW(7/0.203)+50%BD(16/5/0.10) BLACK亮面齒狀 OD=8.0±0.2mm	1800mm
NO.	P/N	DESCRIPTION	QTY

Pin Assignment:

P1		P2
1	RED	1
6	RED SHIELD	6
2	GREEN	2
7	GREEN SHIELD	7
3	BLUE	3
8	BLUE SHIELD	8
4	BROWN	4
5	RED	5
9	ORANGE	9
10	YELLOW	10
11	GREEN	11
12	BLUE	12
13	PURPLE	13
14	BLACK	14
15	WHITE	15
SHELL	BRAID	SHELL
	D.W	

Packing:

1. PACKING METHOD LIKE LETTER "O", BLACK TIE;
2. PE BAG: 200mm*250mm*0.04mm;
3. CARTON: 460mm*300mm*230mm A=A, CARTON MAKE OUT: 2919 (3+9).



P/N	VGA CABLE 2919(3+9) 1.8M M/M			
Item	ARB1511519030180			
Drawn By	Cindy	Customer NO.	NO	N
Audited By			Unit: mm	
Date	2006-09-01	Rev.: 1.00	ME	