
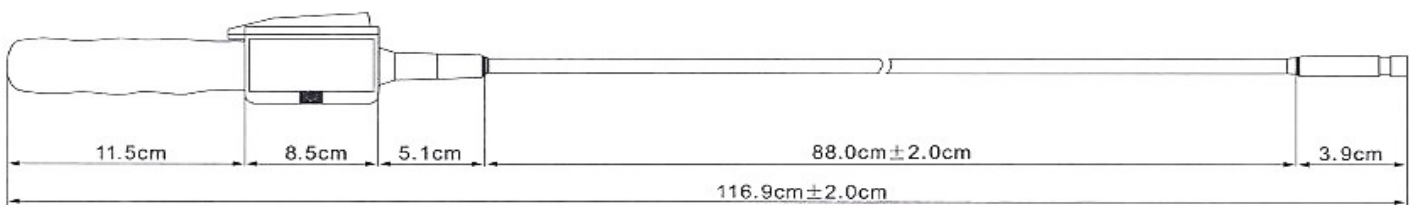


PORTABLE VIDEO ENDOSCOPE

- Description** : Inspection device with LCD Monitor
Housing Color: Grey, Orange
Tube Size : OD:6.8mm / Length: 880 mm
Net Weight : 325g (Accessories weight included)

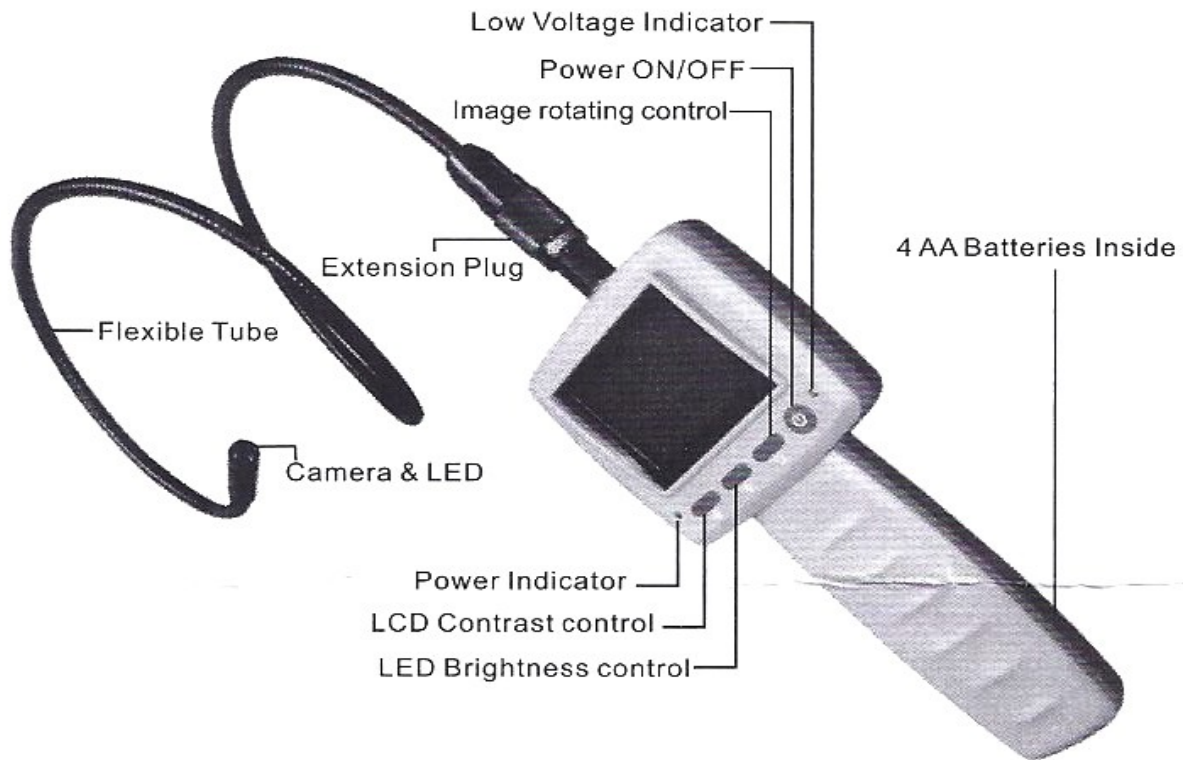

BUY ON
www.cablematic.com

Main Units

Display Unit	
Power	4 x 1.5 (AA) Batteries
Display	2.4" TFT LCD Monitor
Display	Brightness can be adjustable
Video Format	JPEG
Working&Storage temperature range	-20°C to 60°C/ 0°C to 40°C
Functions	Allows for visual inspection for hard-to-reach area

Camera	
10mm diameter len(4mm、 5.5mm、 8.5mm optional)	
Image Sensor	Optical format CMOS image sensor
Pixel Count	320*240; 640*480(optional)
Exposure	30mm-80mm
Auto White Balance	automatic
Distortion	< 3.7%
Power Consumption	3-5W (Active)
Housing material	Aluminum
Field of View(FOV)	54°

Insertion Tube	
Total Length	970 mm
Tube Length	880 mm
Tube Dia.	6.8mm(4mm、 5.5mm optional)

Light Source	
Number of lamps	2PCS、 4PCS(optional)
Weight	About 8 g
Brightness Control	Manual
Lamp Type	LED
Minimum Illumination	0 Lux
Lamp Life	8000 hrs., median

BUY ON
www.cablematic.com

Operating Environment	
Tip Operating Temperature	-20 ° to 60 ° C (-4° to 140° F)
Storage Temperature	-20 ° to 70 ° C (-4° to 158° F)
Relative Humidity	95% max
Waterproof	IP67(Insertion tube and tip)
Hazardous Environments	Not rated for use in hazardous environments