INDEPENDENT

BATTERY CERTIFICATE



CERTIFICATE NUMBER: 0FD5C0D7-E27D-45EC-84E2-0A6762BFBCCC

VEHICLE

BRAND: Hyundai


MODEL: Ioniq 5 - 72,6 kWh


MILEAGE: 55,604 km

VIN: KMHKR81CPNU071445

DATE AND TIME: 06.11.2025, 08:44:18

EXECUTED BY: Carla AB

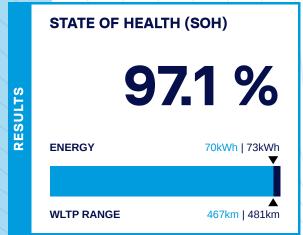

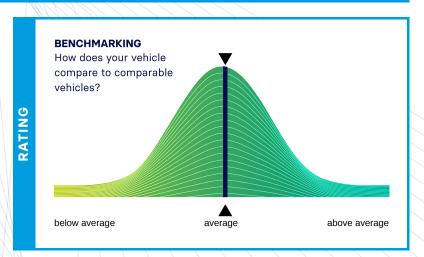

Battery Management System (BMS)

Battery Sensor

Battery Measurements

Battery Cell Voltages

Vehicle Communication



EVALUATION

EXCELLENT HEALTH - NO ABNORMALITIES DETECTED


Based on the detailed battery diagnostics performed with the AVILOO FLASH Test, we hereby certify that the drive battery of this vehicle is in excellent condition.

The drive battery is therefore officially AVILOO Certified.

horans Reigel

Dr. Marcus Berger, CEO





CELL VOLTAGES DIAGRAM

~				
ii .	Current:	74.7kWh	70.5kWh	66.9kWh
ENERGY	New:	77.0kWh	72.6kWh	68.9kWh

	WLTP	Typical	Individual		
Current:	417-467km	334km	413km		
New:	430-481km	344km	426km		

OL	AVILOO Box connected.	08:44:14
၁၀.	FLASH Test started.	✓
ROT	Vehicle detected.	~
<u>a</u>	Starting data acquisition.	✓
EXECUTION PROTOCOL	Finished data acquisition.	~
CU	Analyzing data.	✓
XE	Analysis completed.	✓

Voltage Sensor	✓
Current Sensor	~
Temperature Sensors	~
Cell Voltage Sensors	✓

		Value	Status
	BMS State of Charge (SoC)*:	97%	
BMS	SoC calculation accuracy:		~
œ	BMS State of Health (SoH)*:	99%	
	SoH calculation accuracy:		~

SL		Min	Max	Delta	Status
N N	Battery Temperature	16.0°C	16.0°C	0.0°C	~
ZEN	Cell Voltage	4.080V	4.080V	0mV	~
MEASUREMENTS	Pack Voltage	735.1V			
1EA	Average Current	-1.6A			
~					

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
1 - 20	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080
21 - 40	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080
41 - 60	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080
61 - 80	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080
81 - 100	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080
101 - 120	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080
121 - 140	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080
141 - 160	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080
161 - 180	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080	4.080
MIN 4.0	080 4.0	80 4.08	4.08	0 4.080	4.080	4.080	4.080	4.080	MAX											
AVERAG	Ε																			

SENSORS

^{*}The values shown here were not calculated by AVILOO but correspond to the values read out from the battery management system (BMS) and were calculated by the manufacturer. AVILOO therefore assumes no liability for their accuracy.