INDEPENDENT

BATTERY CERTIFICATE

AVILOO
BATTERY DIAGNOSTICS

CERTIFICATE NUMBER: 38AE3D02-B64E-42FE-8F8F-A8A589F79C92

VEHICLE

BRAND: Hyundai
MODEL: Ioniq - 28 kWh

MILEAGE: 67,727 km
VIN: KMHC851HFKU035373
DATE AND TIME:
09.09.2025, 09:42:16

EXECUTED BY: Carla AB

RESULTS

STATE OF HEALTH (SOH)

92.1 %

ENERGY 25kWh | 27kWh

WLTP RANGE 209km | 227km

RATING

BENCHMARKING
How does your vehicle compare to comparable vehicles?

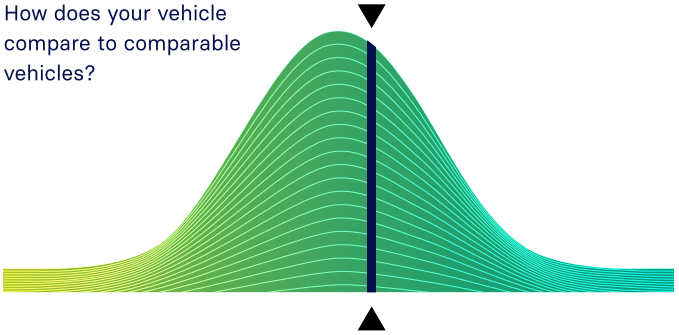

CHECKS

- Battery Management System (BMS) ✓
- Battery Sensor ✓
- Battery Measurements ✓
- Battery Cell Voltages ✓
- Vehicle Communication ✓

SCAN FOR DETAILS

EVALUATION

GOOD HEALTH - NO ABNORMALITIES DETECTED

Based on the detailed battery diagnostics performed with the AVILOO FLASH Test, we hereby certify that the drive battery of this vehicle is in good condition.

The drive battery is therefore officially AVILOO Certified.

Dr. Marcus Berger, CEO

CARA Approved Battery Health Check

BATTERY IS TESTED AND CERTIFIED BY AVILOO
AVILOO CERTIFIED

ENERGY

	Gross	Net (Nominal)	Usable
Current:	25.8kWh	25.1kWh	24.7kWh
New:	28.0kWh	27.2kWh	26.8kWh

RANGE

	WLTP	Typical
Current:	209-209km	164km
New:	227-227km	178km

EXECUTION PROTOCOL

AVILOO Box connected. **09:42:12**

- FLASH Test started. ✓
- Vehicle detected. ✓
- Starting data acquisition. ✓
- Finished data acquisition. ✓
- Analyzing data. ✓
- Analysis completed. ✓

SENSORS

Voltage Sensor	✓
Current Sensor	✓
Temperature Sensors	✓
Cell Voltage Sensors	✓

BMS

	Value	Status
BMS State of Charge (SoC)*:	82%	
SoC calculation accuracy:		✓
BMS State of Health (SoH)*:	100%	
SoH calculation accuracy:		✓

MEASUREMENTS

	Min	Max	Delta	Status
Battery Temperature	23.0°C	23.0°C	0.0°C	✓
Cell Voltage	3.900V	3.920V	20mV	✓
Pack Voltage	376.6V			
Average Current	-2.3A			

CELL VOLTAGES DIAGRAM

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
1 - 20	3.900	3.918	3.918	3.918	3.918	3.918	3.918	3.918	3.918	3.918	3.918	3.918	3.918	3.918	3.918	3.918	3.918	3.918	3.918	3.918
21 - 40	3.918	3.918	3.918	3.918	3.918	3.918	3.918	3.918	3.918	3.918	3.918	3.918	3.918	3.918	3.918	3.918	3.918	3.918	3.918	3.918
41 - 60	3.918	3.918	3.918	3.918	3.918	3.918	3.918	3.918	3.918	3.918	3.918	3.918	3.918	3.918	3.918	3.918	3.918	3.918	3.918	3.918
61 - 80	3.918	3.918	3.918	3.918	3.918	3.918	3.918	3.918	3.918	3.918	3.918	3.918	3.918	3.918	3.918	3.918	3.918	3.918	3.918	3.918
81 - 96	3.918	3.918	3.918	3.918	3.918	3.918	3.918	3.918	3.918	3.918	3.918	3.918	3.918	3.918	3.918	3.920				

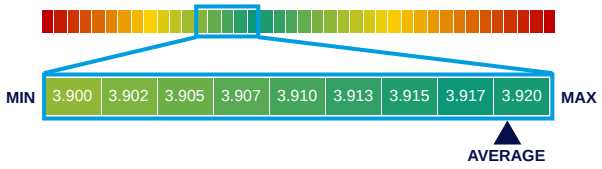

*The values shown here were not calculated by AVILOO but correspond to the values read out from the battery management system (BMS) and were calculated by the manufacturer. AVILOO therefore assumes no liability for their accuracy.

DISCLAIMER: The test result includes the currently calculated state of health (SoH) of the drive battery. The determination is based on data provided by the vehicle. These are evaluated by AVILOOs algorithms using statistical and analytical models. Manipulation of the data in the control unit leads to an incorrect result. The indicated SoH has a technically induced fluctuation range (deviation) of no more than 3% in at least 95% of reference measurements. It should be noted that this tolerance applies to the SoH determination at the cell level and not to the SoH of the entire battery. This is because the state of charge of individual cells may vary, which can negatively affect the current SoH of the battery. However, this can be compensated by the Battery Managament System (BMS) or during a calibration. The result reflects the condition of the battery at the time of the test. No conclusions can be drawn about the future state of health of the battery from this. Statements about mechanical damage or external influences are not part of this diagnosis.

AVILOO GmbH | IZ NÖ-Süd, Straße 16, Objekt 69/5 | 2355 Wiener Neudorf | Austria | info@aviloo.com

38AE3D02-B64E-42FE-8F8F-A8A589F79C92