INDEPENDENT

BATTERY CERTIFICATE



CERTIFICATE NUMBER: B7AF58D7-06BF-4324-B078-590C3F371C05

VEHICLE


BRAND: Volkswagen **MODEL:** ID5 - 77 kWh


MILEAGE: 71,210 km

VIN: WVGZZZE2ZNP510649

DATE AND TIME: 23.10.2025, 11:15:34

EXECUTED BY: Carla AB

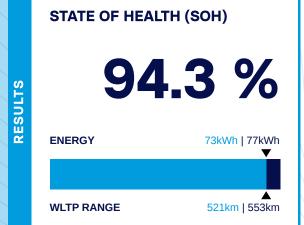

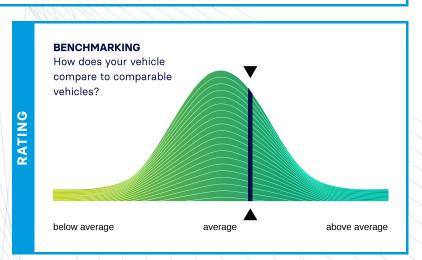

Battery Management System (BMS)

Battery Sensor

Battery Measurements

Battery Cell Voltages

Vehicle Communication



EVALUATION

EXCELLENT HEALTH - NO ABNORMALITIES DETECTED

Based on the detailed battery diagnostics performed with the AVILOO FLASH Test, we hereby certify that the drive battery of this vehicle is in excellent condition.

The drive battery is therefore officially AVILOO Certified.

horas Reiser

Dr. Marcus Berger, CEO





CELL VOLTAGES DIAGRAM

34		Gross	Net (Nominal)	Usable
ENERGY	Current:	77.3kWh	72.6kWh	69.8kWh
Ш	New:	82.0kWh	77.0kWh	74.0kWh
ш.	110111	52.5KW	, ,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	,

ш		WLTP	Typical	Individual
RANGE	Current:	463-521km	376km	338km
2	New:	491-553km	399km	358km

OL	AVILOO Box connected.	11:15:31
00	FLASH Test started.	~
ROT	Vehicle detected.	✓
EXECUTION PROTOCOL	Starting data acquisition.	✓
100	Finished data acquisition.	✓
CO	Analyzing data.	~
EXE	Analysis completed.	✓

Voltage Sensor	✓
Current Sensor	~
Temperature Sensors	~
Cell Voltage Sensors	✓

		Value	Status
	BMS State of Charge (SoC)*:	91%	
BMS	SoC calculation accuracy:		~
a	BMS State of Health (SoH)*:	95%	
	SoH calculation accuracy:		~

	Min	Max	Delta	Status
Battery Temperature	16.1°C	16.8°C	0.6°C	~
Cell Voltage	4.054V	4.063V	9mV	~
Pack Voltage	389.8V			
Average Current	-4.6A			

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
1 - 20	4.060	4.060	4.059	4.063	4.060	4.061	4.060	4.060	4.061	4.054	4.063	4.061	4.063	4.063	4.063	4.061	4.060	4.061	4.059	4.063
21 - 40	4.061	4.063	4.060	4.061	4.059	4.059	4.059	4.058	4.061	4.057	4.059	4.058	4.060	4.060	4.060	4.061	4.060	4.061	4.061	4.059
41 - 60	4.061	4.061	4.060	4.061	4.061	4.061	4.061	4.061	4.059	4.061	4.060	4.060	4.060	4.060	4.061	4.059	4.055	4.059	4.060	4.061
61 - 80	4.061	4.060	4.060	4.061	4.060	4.061	4.060	4.063	4.061	4.063	4.061	4.061	4.060	4.061	4.060	4.061	4.061	4.060	4.060	4.060
81 - 96	4.060	4.060	4.059	4.063	4.060	4.061	4.060	4.060	4.060	4.059	4.060	4.063	4.061	4.063	4.061	4.061	/	/	/	/
									_											
				Щ																
MIN 4	4.054 4	.055 4.	056 4.0	57 4.0	59 4.06	4.06	4.062	4.063	мах											
AVERAGE																				

SENSORS

^{*}The values shown here were not calculated by AVILOO but correspond to the values read out from the battery management system (BMS) and were calculated by the manufacturer. AVILOO therefore assumes no liability for their accuracy.