INDEPENDENT

BATTERY CERTIFICATE



CERTIFICATE NUMBER: D3D181B8-D319-4704-A3B3-D78775B56FEA

VEHICLE

RESULTS

BRAND: Renault

WLTP RANGE

MODEL: Zoe - 52 kWh

MILEAGE: 59,064 km

VIN: VF1AG000366804992


DATE AND TIME: 22.08.2025, 10:13:08

EXECUTED BY: Carla AB

STATE OF HEALTH (SOH)

94.3 %

ENERGY 49kWh | 52kWh ▼

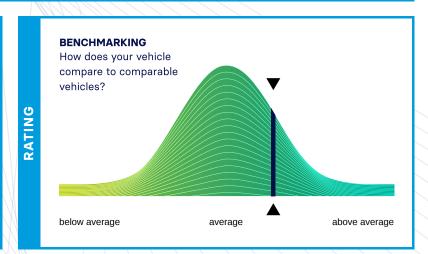

Battery Management System (BMS)

Battery Sensor

Battery Measurements

Battery Cell Voltages

Vehicle Communication



LUATION

EXCELLENT HEALTH - NO ABNORMALITIES DETECTED

373km | 395km


Based on the detailed battery diagnostics performed with the AVILOO FLASH Test, we hereby certify that the drive battery of this vehicle is in excellent condition.

The drive battery is therefore officially AVILOO Certified.

horans Reiger

Dr. Marcus Berger, CEO





CELL VOLTAGES DIAGRAM

X		Gross	Net (Nominal)	Usable
ENERGY	Current:	51.6kWh	49.0kWh	49.0kWh
Z	New:	54.7kWh	52.0kWh	52.0kWh

iii		WLTP	Typical	Individual
RANGE	Current:	364-373km	293km	299km
A.	New:	386-395km	311km	317km

OF	AVILOO Box connected.	10:13:05
00.	FLASH Test started.	~
PROTOCOL	Vehicle detected.	✓
	Starting data acquisition.	~
EXECUTION	Finished data acquisition.	~
CO.	Analyzing data.	✓
EXE	Analysis completed.	~

Voltage Sensor	~
Current Sensor	~
Temperature Sensors	<u> </u>
Cell Voltage Sensors	<u> </u>

		Value	Status
	BMS State of Charge (SoC)*:	96%	
B B S E	SoC calculation accuracy:		~
Δ	BMS State of Health (SoH)*:	95%	
	SoH calculation accuracy:		~

	Min	Max	Delta	Status
Battery Temperature	20.0°C	20.0°C	0.0°C	~
Cell Voltage	4.102V	4.118V	16mV	~
Pack Voltage	394.5V			
Average Current	-1.0A			

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
1 - 20	4.107	4.106	4.106	4.105	4.106	4.107	4.107	4.107	4.113	4.113	4.112	4.111	4.112	4.112	4.112	4.113	4.112	4.112	4.110	4.111
21 - 40	4.112	4.113	4.111	4.113	4.113	4.111	4.111	4.110	4.111	4.111	4.112	4.114	4.112	4.112	4.112	4.112	4.113	4.114	4.113	4.113
41 - 60	4.111	4.110	4.111	4.108	4.109	4.110	4.110	4.111	4.102	4.103	4.107	4.102	4.103	4.103	4.103	4.106	4.112	4.112	4.112	4.116
61 - 80	4.112	4.113	4.111	4.113	4.112	4.112	4.109	4.111	4.113	4.112	4.111	4.111	4.113	4.113	4.110	4.111	4.110	4.112	4.110	4.111
81 - 96	4.113	4.112	4.112	4.112	4.112	4.113	4.113	4.112	4.116	4.116	4.115	4.115	4.115	4.118	4.114	4.116	/	/	/	/
	4 4 0 0 4	104	100 4	100 44	10 4.13	0 411	4 4 4 4 4 4	4 4 4 4 0	1											
MIN	4.102 4	.104 4.	106 4.3	108 4.1	10 4.1.	4.11	4 4.116	4.118	MAX											
					N/E	DACE														
					AVE	RAGE														

SENSORS

^{*}The values shown here were not calculated by AVILOO but correspond to the values read out from the battery management system (BMS) and were calculated by the manufacturer. AVILOO therefore assumes no liability for their accuracy.