INDEPENDENT

BATTERY CERTIFICATE



CERTIFICATE NUMBER: E745225E-E16D-4DF3-8CFE-A661E3B7547C

VEHICLE

BRAND: BMW


MODEL: iX1 - 66,5 kWh


MILEAGE: 18,491 km

VIN: WBY61EF09P5W76731

DATE AND TIME: 03.09.2025, 09:58:21

EXECUTED BY: Carla AB

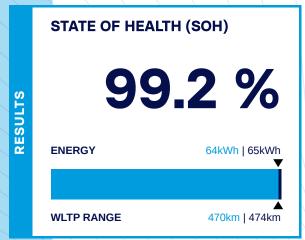

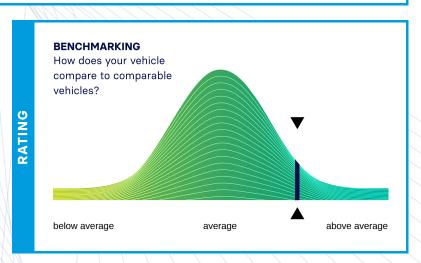

Battery Management System (BMS)

Battery Sensor

Battery Measurements

Battery Cell Voltages

Vehicle Communication



LUATION

EXCELLENT HEALTH - NO ABNORMALITIES DETECTED


Based on the detailed battery diagnostics performed with the AVILOO FLASH Test, we hereby certify that the drive battery of this vehicle is in excellent condition.

The drive battery is therefore officially AVILOO Certified.

horans Reiser

Dr. Marcus Berger, CEO





CELL VOLTAGES DIAGRAM

| 3⊀ | | Gross | Net (Nominal) | Usable |
|--------|----------|---------|---------------|---------|
| ENERGY | Current: | 67.5kWh | 64.2kWh | 62.0kWh |
| Z | New: | 68.0kWh | 64.7kWh | 62.5kWh |
| | | | | |

| iii iii | | WLTP | Typical | Individual |
|------------|----------|-----------|---------|------------|
| RANGE | Current: | 414-470km | 336km | 308km |
| 2 | New: | 417-474km | 338km | 311km |

| 09:58:17 |
|----------|
| ~ |
| ~ |
| ~ |
| ~ |
| ~ |
| ~ |
| |

| Voltage Sensor | ~ |
|----------------------|----------|
| Current Sensor | ~ |
| Temperature Sensors | <u> </u> |
| Cell Voltage Sensors | ~ |

| | | Value | Status |
|----------|-----------------------------|-------|--------|
| | BMS State of Charge (SoC)*: | 66% | |
| BMS | SoC calculation accuracy: | | ~ |
| a | BMS State of Health (SoH)*: | 100% | |
| | SoH calculation accuracy: | | ~ |
| | | | |

| | Min | Max | Delta | Status |
|---------------------|--------|--------|-------|--------|
| Battery Temperature | 21.3°C | 21.6°C | 0.3°C | ~ |
| Cell Voltage | 3.906V | 3.910V | 4mV | ~ |
| Pack Voltage | 305.4V | | | |
| Average Current | -3.0A | | | |

| | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 |
|---------|---------|---------|---------|---------|---------|---------|---------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| 1 - 20 | 3.906 | 3.907 | 3.907 | 3.909 | 3.907 | 3.909 | 3.909 | 3.907 | 3.907 | 3.910 | 3.907 | 3.909 | 3.909 | 3.907 | 3.907 | 3.907 | 3.907 | 3.906 | 3.906 | 3.907 |
| 21 - 40 | 3.909 | 3.907 | 3.907 | 3.907 | 3.907 | 3.907 | 3.906 | 3.907 | 3.906 | 3.907 | 3.907 | 3.910 | 3.910 | 3.910 | 3.907 | 3.909 | 3.909 | 3.910 | 3.907 | 3.907 |
| 41 - 60 | 3.907 | 3.909 | 3.910 | 3.910 | 3.907 | 3.907 | 3.909 | 3.907 | 3.907 | 3.906 | 3.907 | 3.906 | 3.906 | 3.906 | 3.906 | 3.909 | 3.906 | 3.910 | 3.906 | 3.907 |
| 61 - 78 | 3.907 | 3.906 | 3.907 | 3.907 | 3.907 | 3.907 | 3.907 | 3.907 | 3.906 | 3.906 | 3.907 | 3.906 | 3.906 | 3.909 | 3.907 | 3.907 | 3.909 | 3.907 | / | / |
| | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | |
| MIN | 3.906 3 | .907 3. | 907 3.9 | 908 3.9 | 08 3.90 | 09 3.90 | 9 3.909 | 3.910 | мах | | | | | | | | | | | |

SENSORS

^{*}The values shown here were not calculated by AVILOO but correspond to the values read out from the battery management system (BMS) and were calculated by the manufacturer. AVILOO therefore assumes no liability for their accuracy.