

# INDEPENDENT BATTERY CERTIFICATE



CERTIFICATE NUMBER: F775F44F-F68C-48AF-9607-AB47B5DCA563

## VEHICLE

**BRAND:** Audi  
**MODEL:** e-tron 55 - 95 kWh

**MILEAGE:** 53,989 km  
**VIN:** WAUZZZGE3LB022695  
**DATE AND TIME:**  
08.08.2025, 14:16:39

**EXECUTED BY:** Carla AB

## RESULTS

### STATE OF HEALTH (SOH)

# 94.3 %

#### ENERGY

81kWh | 86kWh




#### WLTP RANGE

421km | 446km

## RATING

### BENCHMARKING

How does your vehicle compare to comparable vehicles?

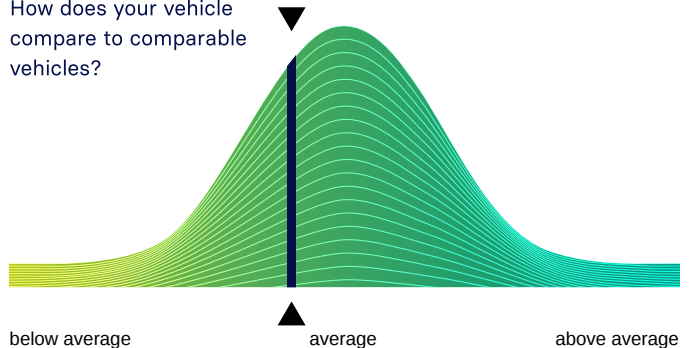

## CHECKS

Battery Management System (BMS) ✓

Battery Sensor ✓

Battery Measurements ✓

Battery Cell Voltages ✓

Vehicle Communication ✓



SCAN FOR DETAILS

## EVALUATION

### GOOD HEALTH - NO ABNORMALITIES DETECTED

Based on the detailed battery diagnostics performed with the AVILOO FLASH Test, we hereby certify that the drive battery of this vehicle is in good condition.

The drive battery is therefore officially AVILOO Certified.

*Marcus Berger*

Dr. Marcus Berger, CEO



	Gross	Net (Nominal)	Usable
Current:	89.6kWh	81.1kWh	78.9kWh
New:	95.0kWh	86.0kWh	83.6kWh

	WLTP	Typical	Individual
Current:	343-421km	296km	497km
New:	364-446km	313km	527km

AVILOO Box connected. 14:16:35


FLASH Test started.	✓
Vehicle detected.	✓
Starting data acquisition.	✓
Finished data acquisition.	✓
Analyzing data.	✓
Analysis completed.	✓

Voltage Sensor	✓
Current Sensor	✓
Temperature Sensors	✓
Cell Voltage Sensors	✓

	Value	Status
BMS State of Charge (SoC)*:	97%	
SoC calculation accuracy:		✓
BMS State of Health (SoH)*:	91%	
SoH calculation accuracy:		✓

	Min	Max	Delta	Status
Battery Temperature	21.0°C	22.0°C	1.0°C	✓
Cell Voltage	4.139V	4.141V	2mV	✓
Pack Voltage	447.2V			
Average Current	-2.9A			

## CELL VOLTAGES DIAGRAM

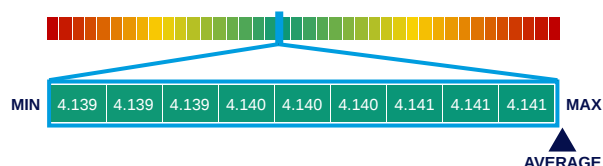[illegible]

**DISCLAIMER:** The test result includes the currently calculated state of health (SoH) of the drive battery. The determination is based on data provided by the vehicle. These are evaluated by AVILOOs algorithms using statistical and analytical models. Manipulation of the data in the control unit leads to an incorrect result. The indicated SoH has a technically induced fluctuation range (deviation) of no more than 3% in at least 95% of reference measurements. It should be noted that this tolerance applies to the SoH determination at the cell level and not to the SoH of the entire battery. This is because the state of charge of individual cells may vary, which can negatively affect the current SoH of the battery. However, this can be compensated by the Battery Management System (BMS) or during a calibration. The result reflects the condition of the battery at the time of the test. No conclusions can be drawn about the future state of health of the battery from this. Statements about mechanical damage or external influences are not part of this diagnosis.