

FEEL GOOD FROM WITHIN



















Head Office: 603, The Ambience Court, Plot No. 2, Sector-19 D, Vashi, Navi Mumbai, Maharashtra, India, Pin 400 705.

Factory: Survey No. 354, Village - Nani Chirai, Taluka Bhachau, Kutch, Gujarat, India, Pin 370 140.





2 0 2 3 - 2 0 2 4










elegant SOLIDS

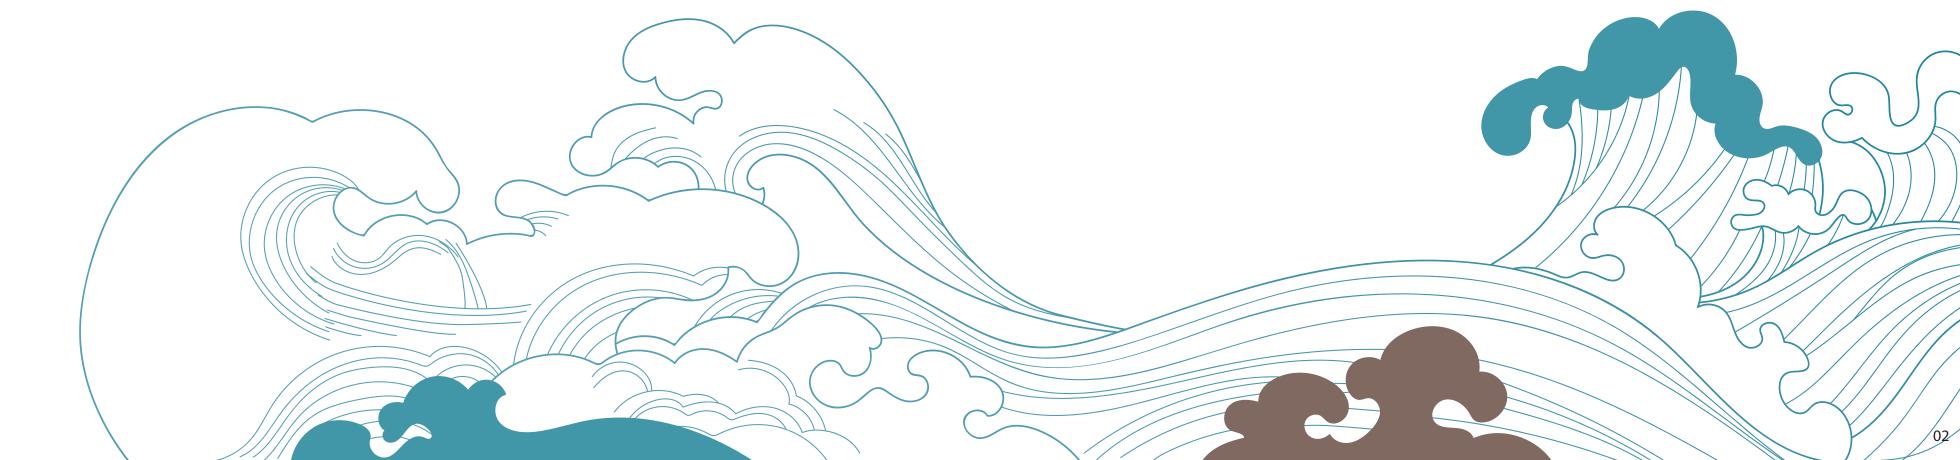










P DorbyEdge® SM 2107

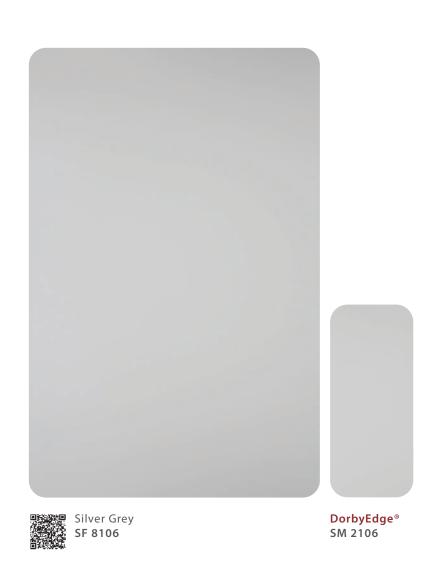





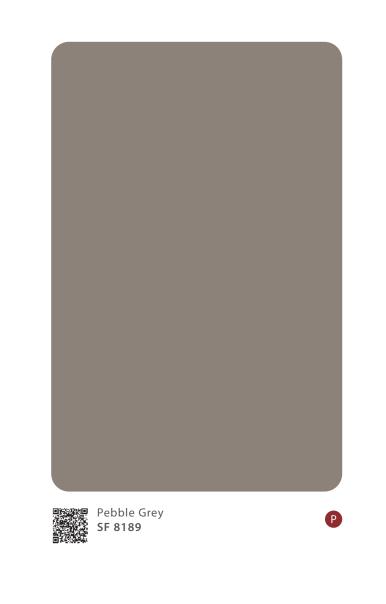

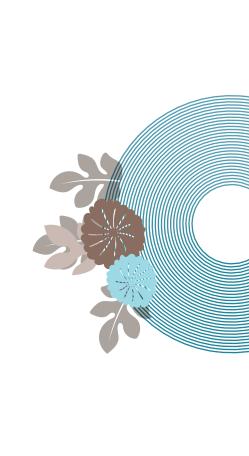







03


Dark Grey
SF 8107










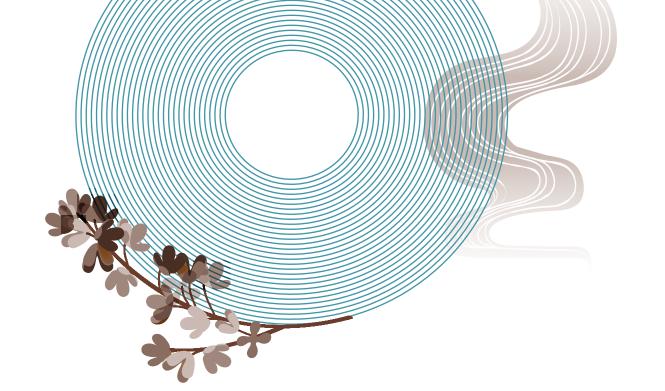

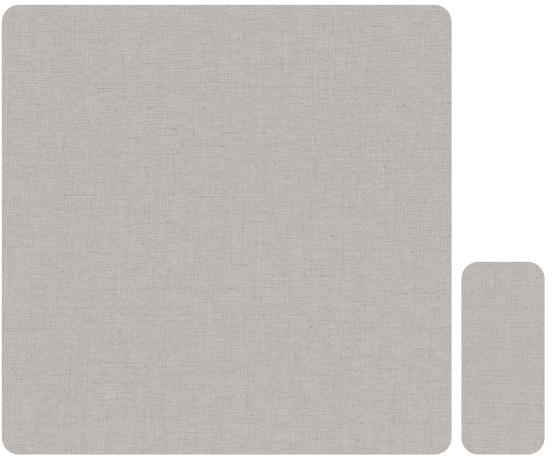

Gauze Linen
SF 878

DorbyEdge® SM 2878













DorbyEdge® SM 2809













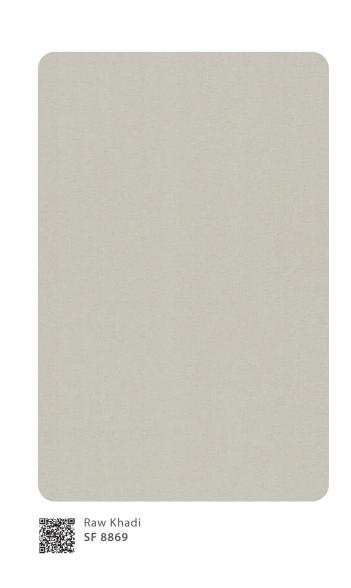







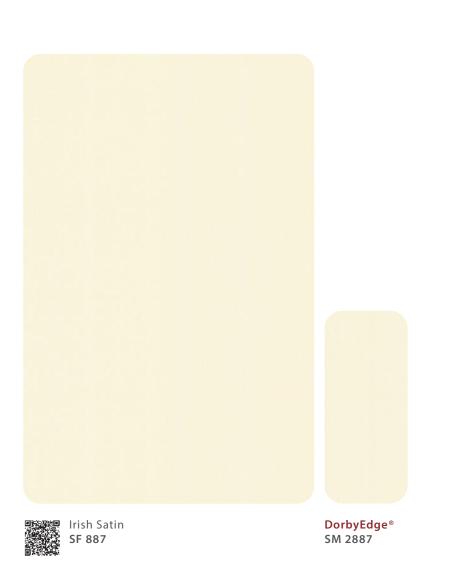



























SM 28874

11



























American Walnut

SF 808





Technical Specification			
		IS:2046-1995,	Arc collection by Dorby
Properties	Unit	Type, VGS	Conforms
Thickness	mm	0.7, 0.8 (± 10%)	٧
Resistance to surface wear	Revolutions. (min)	150	٧
Resistance to immersion in boiling water			
- Mass increase (%)	% Max.	12.0	
- Thickness increase (%)	% Max.	14.0	٧
- Appearance	Grade (not worse than)	4	
Dimensional stability at elevated temperature			
- Longitudinal (%)	% Max. (L)	0.65	V
- Transverse (%)	% Max. (T)	1.15	
Dimensional stability at 20° c			
- Longitudinal (%)	% Max. (L)	0.425	٧
- Transverse (%)	% Max. (T)	0.675	
Resistance to impact by small diameter ball	N (Min.)	20	٧
Resistance to cracking0	Grade (not worse than)	4	٧
Resistance to scratching	N (Min.)	1.75	٧
Resistance to staining	Grade (not worse than)	5	٧
Resistance to colour change			
- In xenon arc light	Grade (not worse than)	6	
- In enclosed carbon arc light	Grade (not worse than)	5	٧
Resistance to steam	Grade (not worse than)	4	٧

Arc collection by Dorby comprises of layers of specially selected paper, impregnated with melamine and phenolic resins pressed and hardened under heat and pressure. The process ensures strong bonding, resistance to boiling water and chemical, and increases dimensional stability. Surface protection through special treatment renders all Dorby products. It is suitable for a wide range of applications such as wall lining, column claddings, doors, shelves, tabletops, work-tops, counters, vanity units, cubicles, lift linings, store fittings, displays, check out desks etc.

Cutting a laminate sheet at an angle of 90° leads to development of cracks in corner after pasting. Therefore, it is advisable to avoid cutting at an angle of 90°. Bonding of laminate under high humidity, plywood with high moisture content, and uneven surfaces, inferior quality adhesive and insufficient pressure may lead to delamination/ air bubbles in between ply and laminates.

Size: 1220 mm X 2440 mm (4' X 8') Thickness: 0.7 mm & 0.8 mm

Disclaimer: Prices may vary with respect to type, finish, thickness, size and colour. Samples presented are indicative of colour, pattern and surface finish but not of actual thicknesses. Please consult with our dealers/ distributors/ branches/ factory before quoting. Advance notice of our intended discontinued items will be made known to our regular customers. Our company shall not be held liable for any consequences resulted from disruption of supply. High pressure laminates are meant for indoor use unless they are of exterior grade that are strictly on intent basis only. Avoid using on areas exposed to direct sunlight or light reflective areas.

Limited Warranty*: Pegasus Panels Pvt Ltd warrants that under normal use and services, the material and workmanship of their products shall conform to standards set forth on the applicable technical data sheet for a period of 12 months from the date of sale to the first consumer purchaser. Dealers and distributors are provided with the technical data sheets, which contain specific standards of performance for the products. In the event that a Pegasus Panels Pvt Ltd. product does not perform as warranted the first purchaser's sole remedy shall be limited to repair or replacement of all or any part of the product, which is defective, at manufacturer's sole discretion. This warranty is not transferable and expires upon resale or transfer by the first consumer purchaser. This warranty shall not apply to defects or damage arising from any of the following: Accidents, abuse or misuse, exposure to extreme temperature, improper fabrication or installation, improper maintenance. No other warranties, expressed or implied, are made. Under no circumstances shall the manufacturer be liable for any loss or damage arising from the purchase, use, or inability to use this product, or for any special, indirect, incidental or consequential damages. No fabricator, installer, dealer, agent or employee of Pegasus Panels Pvt Ltd has the authority to modify the obligation or limitation of this warranty.

Special markings in Arc collection by Dorby catalogue P - Paper Premium

DorbyEgde® - Exclusive edge bands













*Terms and Conditions apply


For further queries you can write to us at - info@pegasuspanel.in

Discover a full spectrum

OF ENDLESS POSSIBILITIES WITH DORBY®



Canvas Collection | Thickness: 1 mm

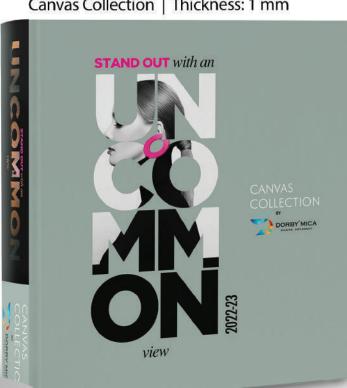

Arc Collection | Thickness: 0.7 mm & 0.8 mm

