

## Druckarmaturen SFS Gerade

### Anschluss

SAE-Flansch 6000PSI (S-Reihe)

### Norm

ISO 6162-2

### Anwendung


TE / SN / SC / SN-K / PTFE Schläuche

### Werkstoff

Stahl

### Oberfläche

galvanisch verzinkt

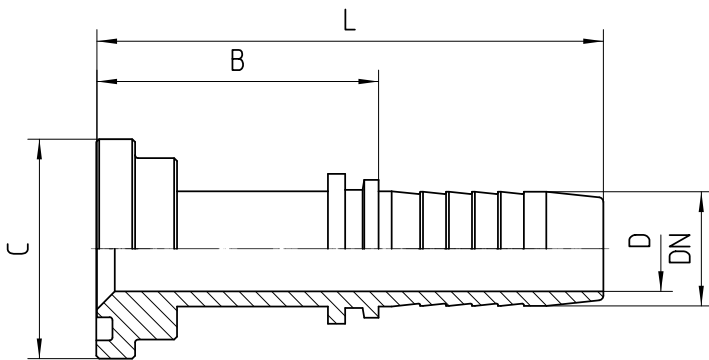

Bestell-Nr.	DN in mm	Flansch in Zoll	C in mm	min. D in mm	B±3 in mm	L±3 in mm

<b>1.421-08-08</b>	12	1/2	31,7	10,0	46	77
<b>1.421-12-08</b>	12	3/4	41,3	10,0	47	78
<b>1.421-08-10</b>	16	1/2	31,7	12,6	46	80
<b>1.421-12-10</b>	16	3/4	41,3	12,6	44	78
<b>1.421-08-12</b>	19	1/2	31,7	14,0	54	92
<b>1.421-12-12</b>	19	3/4	41,3	14,8	52	91
<b>1.421-16-12</b>	19	1	47,6	14,8	53	92
<b>1.421-12-16</b>	25	3/4	41,3	20,0	55	101
<b>1.421-16-16</b>	25	1	47,6	21,1	56	102
<b>1.421-20-16</b>	25	1 1/4	54,0	21,1	52	98
<b>1.421-16-20</b>	31	1	47,6	26,5	64	118
<b>1.421-20-20</b>	31	1 1/4	54,0	26,5	61	115
<b>1.421-24-20</b>	31	1 1/2	63,5	26,5	66	120
<b>1.421-20-24</b>	38	1 1/4	54,0	32,5	63	120
<b>1.421-24-24</b>	38	1 1/2	63,5	32,8	64	121
<b>1.421-32-24</b>	38	2	79,4	32,8	75	132
<b>1.421-24-32</b>	51	1 1/2	63,5	32,5	69	144
<b>1.421-32-32</b>	51	2	79,4	44,5	76	151