

## Druckarmaturen DKOS 90°

### Anschluss

Dichtkopf 24° Außenkonus O-Ring-dichtend mit metrischer Mutter S-Reihe

### Norm

ISO 8434-1

### Anwendung


4SH Schläuche

### Werkstoff

Stahl

### Oberfläche

galvanisch verzinkt

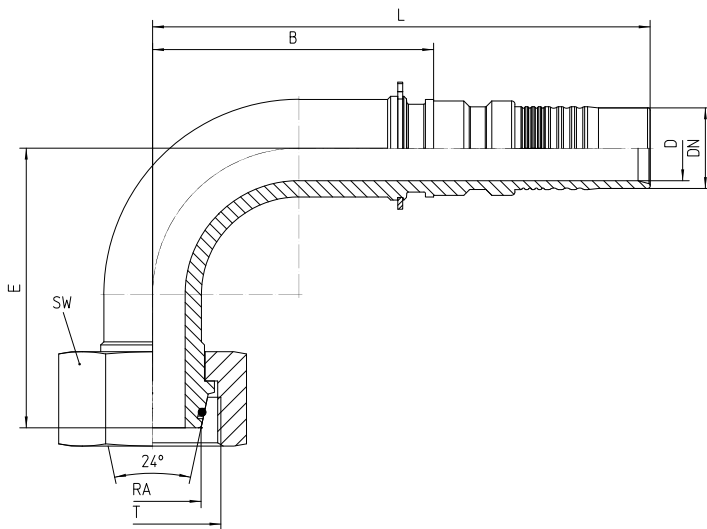

Bestell-Nr.	DN in mm	RA	T	SW in mm	min. D in mm	E±3 in mm	B±3 in mm	L±3 in mm	Hinweis
5.089-10-12	19	20S	M 30x2.0	36	13,0	68	60	101	
5.089-12-12/SW46	19	25S	M 36x2.0	46	14,8	70	60	101	
5.089-16-12	19	30S	M 42x2.0	50	14,8	67	60	101	
5.089-12-16/SW46	25	25S	M 36x2.0	46	15,0	76	81	133	*
5.089-16-16	25	30S	M 42x2.0	50	20,0	80	82	131	*
5.089-20-16	25	38S	M 52x2.0	60	20,0	75	81	133	*
5.089-16-20	31	30S	M 42x2.0	50	20,0	108	102	171	
5.089-20-20	31	38S	M 52x2.0	60	25,0	108	102	171	
5.089-20-24	38	38S	M 52x2.0	60	25,0	108	121	190	

#### Hinweis

\* geänderte Kontur aus sicherheitsrelevanten Gründen, daher Maßabweichungen vom marktüblichen System

#### Zubehör

- O-Ring DKOL/DKOS