

Druckarmaturen DKOS 45°

Anschluss

Dichtkopf 24° Außenkonus O-Ring-dichtend mit metrischer Mutter S-Reihe

Norm

ISO 8434-1

Anwendung


4SH / R15 / R13 (DN51) Schläuche

Werkstoff

Stahl

Oberfläche

galvanisch verzinkt

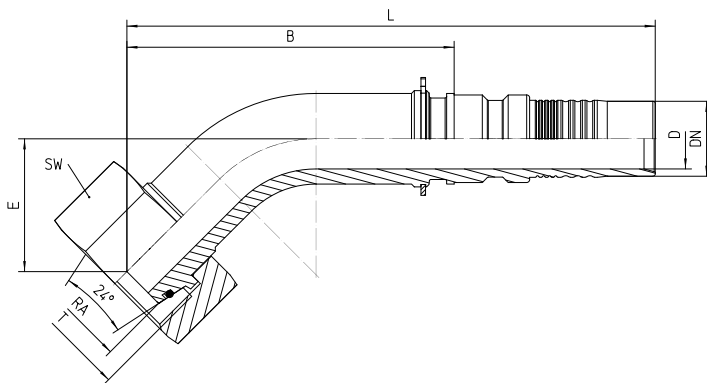

| Bestell-Nr. | DN in mm | RA | T | SW in mm | min. D in mm | E±3 in mm | B±3 in mm | L±3 in mm | Hinweis |
|-------------|----------|----|---|----------|--------------|-----------|-----------|-----------|---------|
| | | | | | | | | | |

| | | | | | | | | | |
|-------------------------|----|-----|-----------|----|----|----|-----|-----|---|
| 7.085-10-10 | 16 | 20S | M 30x2 | 36 | 12 | 30 | 73 | 120 | |
| 7.085-12-12/SW41 | 19 | 25S | M 36x2 | 41 | 15 | 41 | 92 | 148 | |
| 7.085-12-12/SW46 | 19 | 25S | M 36x2 | 46 | 15 | 41 | 92 | 148 | |
| 7.085-12-16/SW46 | 25 | 25S | M 36x2 | 46 | 17 | 48 | 119 | 185 | b |
| 7.085-16-16 | 25 | 30S | M 42x2 | 50 | 20 | 44 | 108 | 175 | |
| 7.585-20-16 | 25 | 38S | M 52x2 | 60 | 20 | 60 | 151 | 218 | |
| 7.585-20-20 | 31 | 38S | M 52x2 | 60 | 25 | 56 | 143 | 223 | |
| 7.585-20-24 | 38 | 38S | M 52x2 | 60 | 25 | 52 | 154 | 245 | b |

Hinweis

a) nicht nach ISO 8434-1, b) Stiftmutterausführung

Zubehör

- O-Ring DKOL/DKOS