

Druckarmaturen AGR Zylindrisch Gerade

Anschluss

BSPB Außengewinde (G) mit 60° Innenkonus

Norm

ISO 8434-6

Anwendung


4SH / R15 / R13 (DN51) Schläuche

Werkstoff

Stahl

Oberfläche

galvanisch verzinkt

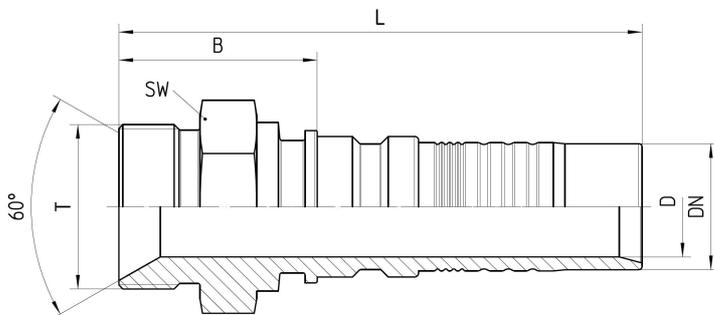

Bestell-Nr.	DN in mm	T in Zoll	SW in mm	min. D in mm	B±3 in mm	L±3 in mm
7.260-12-12	19	G 3/4	30	15	37	93
7.260-16-16	25	G 1	36	20	46	112

7.260-20-20	31	G 1 1/4	46	25	49	129
7.260-24-24	38	G 1 1/2	55	30	51	142
7.260-32-32	51	G 2	65	40	57	148