

## Druckarmaturen DKOR 45°

### Anschluss

Dichtkopf 60° Außenkonus O-Ring-dichtend mit BSPP Mutter (G)

### Norm

ISO 8434-6

### Anwendung


4SH / R15 / R13 (DN51) Schläuche

### Werkstoff

Stahl

### Oberfläche

galvanisch verzinkt

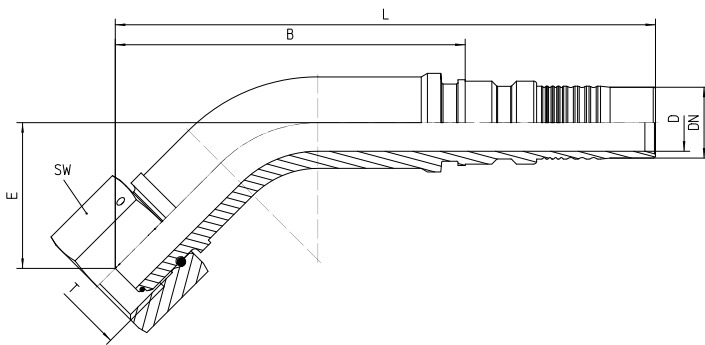

Bestell-Nr.	DN in mm	T in Zoll	SW in mm	min. D in mm	E±3 in mm	B±3 in mm	L±3 in mm
7.233-12-12/O	19	G 3/4	32	15,0	39	95	151

<b>7.233-16-16/O</b>	25	G 1	41	20,0	51	122	189
<b>7.233-20-20/O</b>	31	G 1 1/4	50	25,0	54	145	225
<b>7.233-24-24/O</b>	38	G 1 1/2	55	30,0	68	157	248
<b>7.233-32-32/O</b>	51	G 2	70	40,0	76	190	281