

## Pressure fittings ORFS straight

### Connection

Flat sealing head with UN nut

### Standard

ISO 8434-3

### Application



TE / SN / SC / SN-K / PTFE flexible tubes

### Material

Steel

### Surface protection

Zinc-electroplated

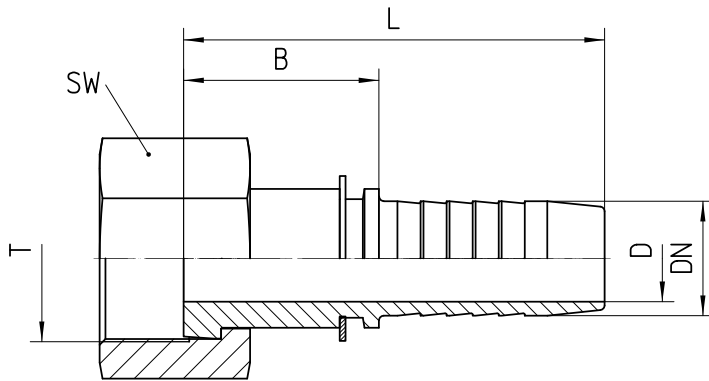

Bestell-Nr.	DN in mm	T in UNF/UN/UNS	SW in mm	min. D in mm	B $\pm$ 3 in mm	L $\pm$ 3 in mm
-------------	----------	-----------------	----------	--------------	-----------------	-----------------

<b>1.315-04-04</b>	06	9/16-18 UNF	17	4,0	22	49
<b>1.315-06-04</b>	06	11/16-16 UN	22	4,0	22	49
<b>1.315-06-05</b>	08	11/16-16 UN	22	5,5	22	49
<b>1.315-04-06</b>	10	9/16-18 UNF	17	4,0	22	51
<b>1.315-06-06</b>	10	11/16-16 UN	22	7,0	24	54
<b>1.315-08-06</b>	10	13/16-16 UN	24	7,0	22	52
<b>1.315-06-08</b>	12	11/16-16 UN	22	6,6	24	56
<b>1.315-08-08</b>	12	13/16-16 UN	24	10,0	21	52
<b>1.315-10-08</b>	12	1-14 UNS	30	10,0	25	56
<b>1.315-08-10</b>	16	13/16-16 UN	24	10,0	26	60
<b>1.315-10-10</b>	16	1-14 UNS	30	13,0	31	65
<b>1.315-12-10</b>	16	1 3/16-12 UN	36	13,0	27	61
<b>1.315-12-12</b>	19	1 3/16-12 UN	36	15,0	34	73
<b>1.315-16-12</b>	19	1 7/16-12 UN	41	15,0	30	69
<b>1.315-16-16</b>	25	1 7/16-12 UN	41	21,0	37	83
<b>1.315-20-16</b>	25	1 11/16-12 UN	50	21,0	34	80
<b>1.315-20-20</b>	31	1 11/16-12 UN	50	27,0	37	91
<b>1.315-24-20</b>	31	2-12 UN	60	27,0	38	92
<b>1.315-24-24</b>	38	2-12 UN	60	32,0	39	96