

Pressure fittings DKOR straight

Connection

Sealing head 60° outside cone O-ring sealing with BSPP nut (G)

Standard

ISO 8434-6

Application



4SH / R15 / R13 (DN51) flexible tubes

Material

Steel

Surface protection

Zinc-electroplated

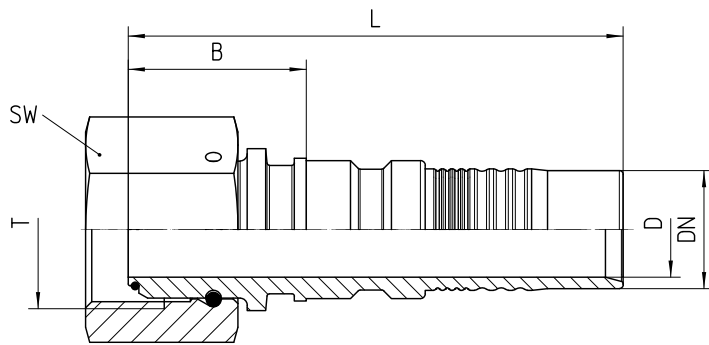

Bestell-Nr.	DN in mm	T in inch	SW in mm	min. D in mm	B±3 in mm	L±3 in mm
-------------	----------	-----------	----------	--------------	-----------	-----------

7.203-12-12/O	19	G 3/4	32	15,0	56	87
7.203-16-16/O	25	G 1	41	20,0	37	104
7.203-20-20/O	31	G 1 1/4	50	25,0	39	119
7.203-24-24/O	38	G 1 1/2	55	30,0	37	129
7.203-32-32/O	51	G 2	70	40,0	91	137