

## Pressure fittings SFL 45°

### Connection

SAE flange 3000PSI (L series)

### Standard

ISO 6162-1

### Application


4SH / R15 / R13 (DN51) flexible tubes

### Material

Steel

### Surface protection

Zinc-electroplated

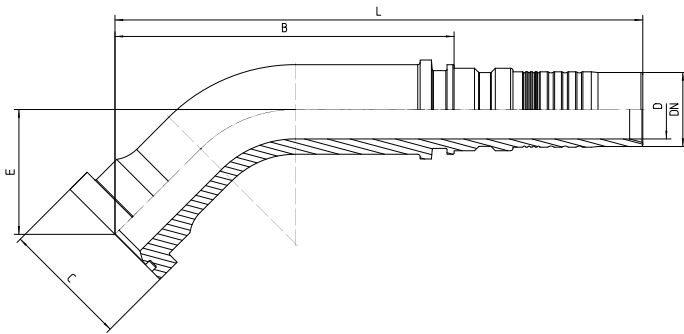

Bestell-Nr.	DN in mm	flange in inch	C in mm	min. D in mm	E±3 in mm	B±3 in mm	L±3 in mm
7.450-12-12	19	3/4	38,1	15,0	30	81	137

<b>7.450-16-16</b>	25	1	44,5	20,0	46	114	181
<b>7.450-20-20</b>	31	1 1/4	50,8	25,0	53	145	225
<b>7.450-24-24</b>	38	1 1/2	60,3	30,0	60	153	244
<b>7.450-32-32</b>	51	2	71,4	40,0	66	150	241